


ISO KAMALI MORS ADAPTÖRÜ

DIN 2080

ISO 2583

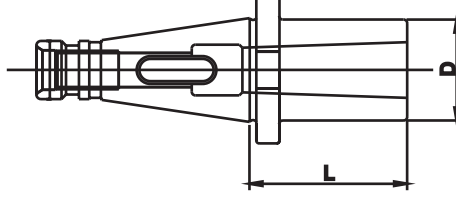

DIN 6383


- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	D (mm)	L (mm)	FİYAT KODU
ISO40.K.MK1	ISO 40	MK1	25	50	00419
ISO40.K.MK2	ISO 40	MK2	32	50	00420
ISO40.K.MK3	ISO 40	MK3	40	65	00421
ISO40.K.MK4	ISO 40	MK4	48	95	00422
ISO50.K.MK3	ISO 50	MK3	40	65	00423
ISO50.K.MK4	ISO 50	MK4	48	70	00424
ISO50.K.MK5	ISO 50	MK5	63	105	00425

ISO ÇEKTİRME CİVATALI MORS ADAPTÖRÜ

DIN 2080

ISO 2583

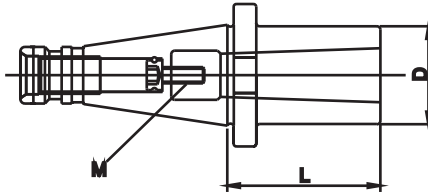

DIN 6364

- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	D (mm)	L (mm)	M (mm)	FİYAT KODU
ISO40.C.MK1	ISO 40	MK1	25	50	M6	00426
ISO40.C.MK2	ISO 40	MK2	32	50	M10	00427
ISO40.C.MK3	ISO 40	MK3	40	65	M12	00428
ISO40.C.MK4	ISO 40	MK4	63	95	M16	00429