


DELTA®

D40

TESPİT BURCU



- Malzeme : Asil Çelik 1.7131 (16MnCr5)
- Sertlik : 62± 2 HRC
- Isıl İşlem : Sementasyon DIN 16759

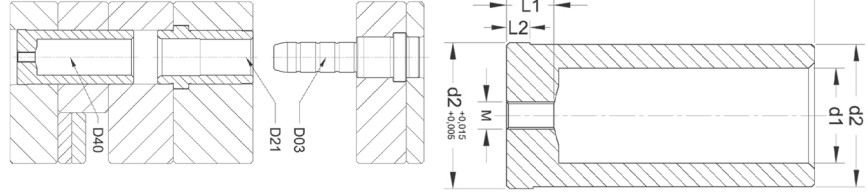

| Sip. No. | d2 | L | d1 | M | L1 | L2 | d2 Tol. |
|-----------|-----|-----|----|----|----|-----|---------|
| D40_20030 | 20 | 30 | 16 | 12 | 10 | 2 | g6 |
| 040 | | 40 | | | | | |
| 060 | | 60 | | | | | |
| 080 | | 80 | | | | | |
| 100 | | 100 | | | | | |
| 120 | | 120 | | | | | |
| 140 | | 140 | | | | | |
| 160 | | 160 | | | | | |
| D40_26030 | 26 | 30 | 21 | 12 | 13 | 2.5 | g6 |
| 040 | | 40 | | | | | |
| 060 | | 60 | | | | | |
| 080 | | 80 | | | | | |
| 100 | | 100 | | | | | |
| 120 | | 120 | | | | | |
| 140 | | 140 | | | | | |
| 160 | | 160 | | | | | |
| 180 | 180 | | | | | | |
| D40_30040 | 30 | 40 | 25 | 12 | 13 | 2.5 | g6 |
| 060 | | 60 | | | | | |
| 080 | | 80 | | | | | |
| 100 | | 100 | | | | | |
| 120 | | 120 | | | | | |
| 140 | | 140 | | | | | |
| 160 | | 160 | | | | | |
| 180 | | 180 | | | | | |
| 200 | | 200 | | | | | |
| 240 | | 240 | | | | | |

| Sip. No. | d2 | L | d1 | M | L1 | L2 | d2 Tol. |
|-----------|-----|-----|----|----|----|-----|---------|
| D40_42040 | 42 | 40 | 33 | 12 | 16 | 4.5 | g6 |
| 060 | | 60 | | | | | |
| 080 | | 80 | | | | | |
| 100 | | 100 | | | | | |
| 120 | | 120 | | | | | |
| 140 | | 140 | | | | | |
| 160 | | 160 | | | | | |
| 180 | | 180 | | | | | |
| 200 | | 200 | | | | | |
| 220 | | 220 | | | | | |
| 260 | 260 | | | | | | |
| 300 | 300 | | | | | | |
| D40_54060 | 54 | 60 | 43 | 12 | 16 | 4.5 | f6 |
| 080 | | 80 | | | | | |
| 120 | | 120 | | | | | |
| 160 | | 160 | | | | | |
| 200 | | 200 | | | | | |
| 240 | | 240 | | | | | |
| 280 | 280 | | | | | | |