

SERIES 118 DIGITAL CALIPER




118-020-11

unit: mm

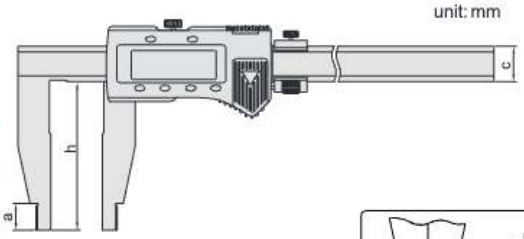



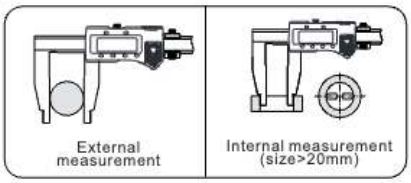

Code	Range	Accuracy	a	c	h
118-012-11	0-300mm/0-12"	±0.04mm	18	24	100
118-012-12	0-300mm/0-12"	±0.05mm	18	24	150
118-012-13	0-300mm/0-12"	±0.05mm	18	24	200
118-018-11	0-450mm/0-18"	±0.05mm	18	24	100
118-020-11	0-500mm/0-20"	±0.05mm	18	24	100
118-020-12	0-500mm/0-20"	±0.06mm	18	24	150
118-020-13	0-500mm/0-20"	±0.06mm	24	32	200
118-020-14	0-500mm/0-20"	±0.08mm	24	42	300
118-024-11	0-600mm/0-24"	±0.05mm	18	24	100
118-024-12	0-600mm/0-24"	±0.06mm	18	24	150
118-024-13	0-600mm/0-24"	±0.06mm	24	32	200
118-024-15	0-600mm/0-24"	±0.08mm	24	42	300
118-032-11	0-800mm/0-32"	±0.07mm	24	32	150
118-040-11	0-1000mm/0-40"	±0.08mm	24	32	150
118-040-12	0-1000mm/0-40"	±0.08mm	24	32	200
118-040-13	0-1000mm/0-40"	±0.10mm	24	42	300
118-048-11	0-1200mm/0-48"	±0.11mm	24	42	150
118-060-11	0-1500mm/0-60"	±0.11mm	24	42	150
118-060-12	0-1500mm/0-60"	±0.12mm	24	42	200
118-080-11	0-2000mm/0-80"	±0.14mm	24	42	150
118-080-12	0-2000mm/0-80"	±0.14mm	24	42	200


*NEW

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, ABS, data preset
- Data output(cable code:100-15)
- Made of stainless steel

SERIES 118 DIGITAL CALIPER


Data output

CR2032

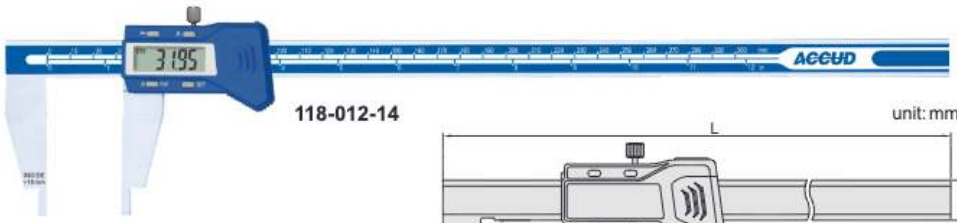

118-012-14


unit: mm

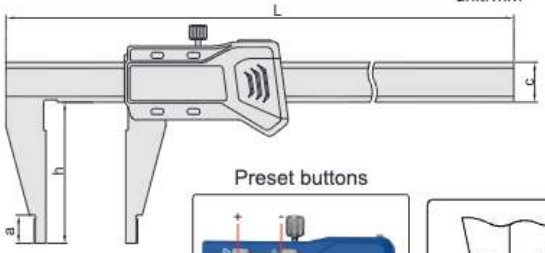


- Resolution: 0.01mm/0.0005"
- Buttons: mm/in, SET, preset(P+,P-)
- Automatic power on/off
- Data output(cable code:100-03 or 100-04)
- Made of stainless steel

Preset buttons





Preset: 10mm,result=reading

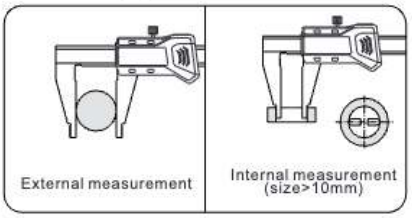

External measurement

Internal measurement (size>10mm)

Code	Range	Accuracy	a	c	h	L
118-008-11	0-200mm/0-8"	±0.03mm	12	17	60	320
118-012-14	0-300mm/0-12"	±0.04mm	12	17	60	420
118-012-15	0-300mm/0-12"	±0.06mm	12	17	90	420