SERIES 211 DIGITAL INDICATOR


Certificate | Data output | CR2032

- With analog reading
- Button: tolerance set, data preset, inch/mm conversion, measuring direction set, max./min./range measurement, absolute/incremental measurement
- Data output(cable code:200-03 or 200-04)
- Automatic power off
- Supplied with flat and lug back

VIDEO



211-010-13



Range: 0-12.7mm

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis
211-010-03	12.7mm/0.5"	5μm	2μm
211-025-03	25.4mm/1"	5μm	3μm
211-050-03	50.8mm/2"	6μm	3μm

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis
211-010-13	12.7mm/0.5"	20μm	10μm
211-025-13	25.4mm/1"	20μm	10μm
211-050-13	50.8mm/2"	30μm	10μm


With manufacturer inspection certificate

Styli(optional)




Application



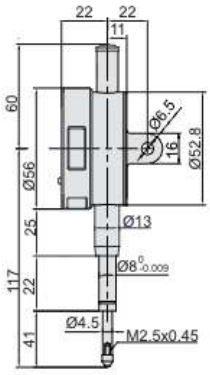

Range: 0-25.4mm

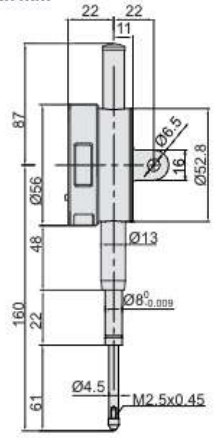

Range: 0-50.8mm