SERIES 214 DIGITAL INDICATOR

Data output CR2032

- Button: on/off, zero, inch/mm conversion, measuring direction set, data preset absolute/incremental measurement
- Automatic power off
- Data output(cable code:200-01 or 200-02)
- Supplied with lug and flat back

VIDEO

Styli(optional)




Application





214-100-11

unit: mm

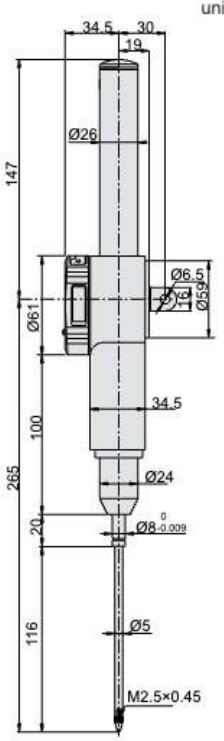

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis
214-100-01	100mm/4"	9μm	3μm

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis
214-100-11	100mm/4"	30μm	10μm

SERIES 214 DIGITAL INDICATOR

Certificate | Data output | CR2032

- Button: on/off, zero, inch/mm conversion, measuring direction set, data preset absolute/incremental measurement
- Automatic power off
- Data output(cable code:200-01 or 200-02)
- Supplied with flat back

VIDEO



214-005-12


Styli(optional)



Application



unit: mm

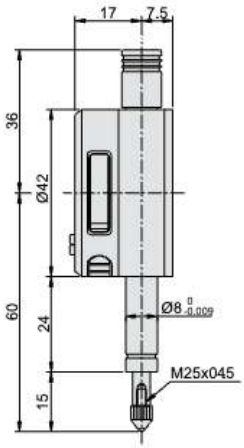

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis
214-005-02	5mm/0.2"	5μm	3μm

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis
214-005-12	5mm/0.2"	20μm	10μm

With manufacturer inspection certificate