SERIES 229 DIAL INDICATOR


Certificate

- Graduation: 0.01mm
- With limit hands
- With lock screw



229-025-61P

unit: mm

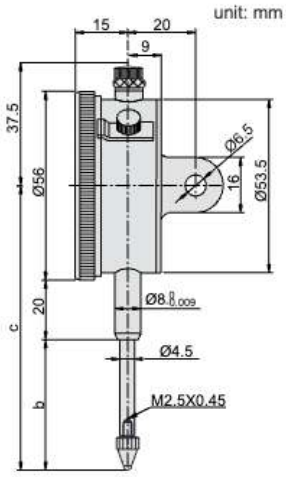

Styli(optional)



Application



Code	Range	Accuracy	Hysteresis	Range/rev	Scale	Back	b	c
229-020-61P	20mm	25μm	5μm	1mm	0-100	lug	33	81
229-025-61P	25mm	35μm	7μm	1mm	0-100	lug	33	81
229-030-61P	30mm	35μm	7μm	1mm	0-100	lug	40	88
229-020-62P	20mm	25μm	5μm	1mm	0-100	flat	33	81
229-025-62P	25mm	35μm	7μm	1mm	0-100	flat	33	81
229-030-62P	30mm	35μm	7μm	1mm	0-100	flat	40	88

With manufacturer inspection certificate

SERIES 229 DIAL INDICATOR

Note: 229-100-21 can only be used vertically

Certificate

- Graduation: 0.01mm
- With limit hands
- Rang per revolution: 1mm
- Supplied with lug and flat back

Stem clamp Ø10mm for **229-100-21** (included)



Styli**(optional)**




Application





229-050-21

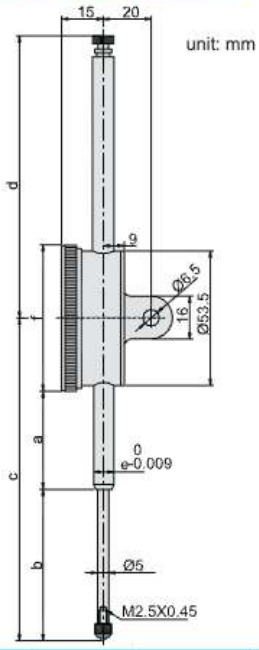

Code	Range	Accuracy	Hysteresis	Scale	a	b	c	d	e	f
229-050-21*	50mm	40μm	8μm	0-100	40	58	127	108	Ø8	Ø58
229-100-21	100mm	50μm	9μm	0-100	60	108	207	168	Ø10	Ø78

* **With manufacturer inspection certificate**

SERIES 229 DIAL INDICATOR


Certificate

- Graduation: 0.01mm
- With limit hands
- Rang per revolution: 1mm
- Supplied with lug and flat back



229-030-11

unit: mm

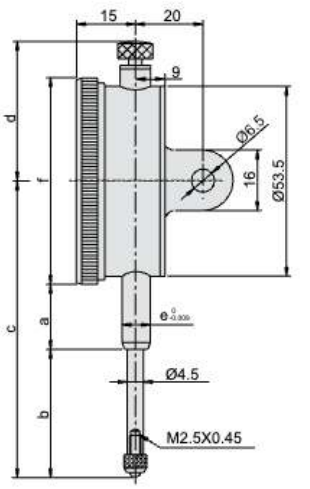

Styli(optional)



Series 270

Application



Code	Range	Accuracy	Hysteresis	Scale	a	b	c	d	e	f
229-020-11	20mm	25μm	5μm	0-100	20	35	83	37.5	Ø8	Ø58
229-030-11	30mm	35μm	7μm	0-100	20	40	88	37.5	Ø8	Ø58

With manufacturer inspection certificate