SERIES 325 OUTSIDE MICROMETER WITH INTERCHANGEABLE ANVILS

- Graduation: .0001" (within 12")
  .001" (over 12")
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards



325-006-E01


Setting standards **(included)**




Interchangeable anvils **(included)**



for different measuring ranges

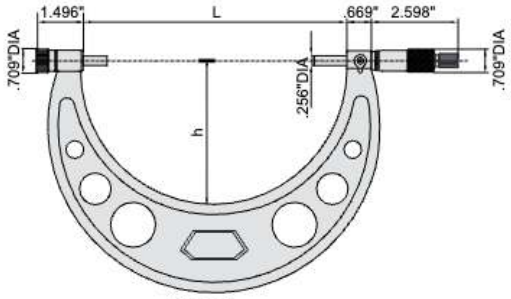

type A

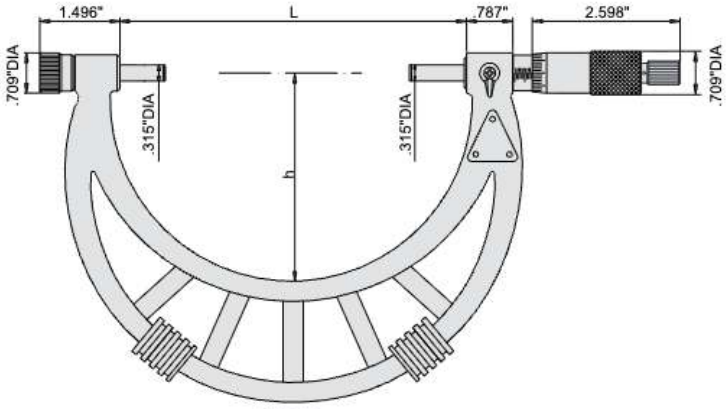

type B

Code	Range	Accuracy	Type	L	h	Setting standards (included)
325-002-E01	0-2"	.00015"	A	2.283"	1.378"	1"
325-004-E01	0-4"	.00020"	A	4.252"	2.244"	1", 2", 3"
325-006-E01	0-6"	.00025"	A	6.220"	3.228"	1", 2", 3", 4", 5"
325-008-E01	4-8"	.00030"	A	8.189"	4.488"	4", 5", 6", 7"
325-012-E01	6-12"	.00035"	A	12.126"	6.496"	6", 7", 8", 9", 10", 11"
325-016-E02	12-16"	.00045"	B	16.102"	8.819"	13", 15"
325-020-E02	16-20"	.00050"	B	20.039"	10.827"	17", 19"
325-024-E02	20-24"	.00055"	B	23.976"	12.638"	21", 23"
325-028-E02	24-28"	.00065"	B	27.913"	14.606"	25", 27"
325-032-E02	28-32"	.00070"	B	31.850"	16.772"	29", 31"
325-036-E02	32-36"	.00080"	B	35.787"	18.740"	33", 35"
325-040-E02	36-40"	.00085"	B	39.724"	22.677"	37", 39"

SERIES 325 OUTSIDE MICROMETER WITH INTERCHANGEABLE ANVILS

- Graduation: 0.01mm
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards



325-006-01

unit: mm

Setting standards **(included)**




Interchangeable anvils **(included)**




for different measuring ranges

type A

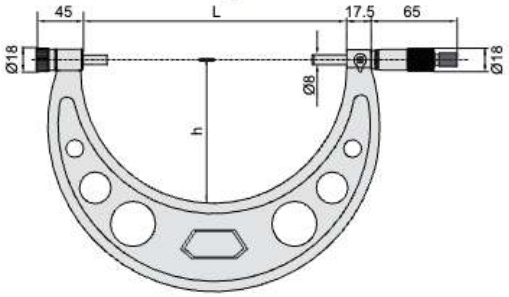

type B

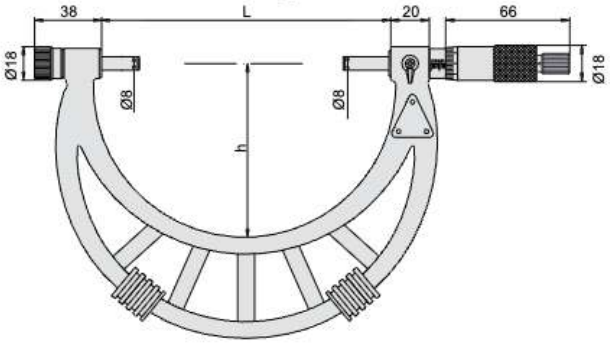

Code	Range	Accuracy	Type	L	h	Setting standards(included)
325-002-01	0-50mm	4μm	A	58	35	25mm
325-004-01	0-100mm	5μm	A	108	57	25,50,75mm
325-006-01	0-150mm	6μm	A	158	82	25,50,75,100,125mm
325-008-01	100-200mm	7μm	A	208	114	100,125,150,175mm
325-012-01	150-300mm	9μm	A	308	165	150,175,200,225,250,275mm
325-006-02	50-150mm	6μm	A	158	82	50,75,100,125mm
325-012-02	200-300mm	9μm	A	308	165	200,225,250,275mm
325-016-02	300-400mm	11μm	B	409	224	325,375mm
325-020-02	400-500mm	13μm	B	509	275	425,475mm
325-024-02	500-600mm	14μm	B	609	321	525,575mm
325-028-02	600-700mm	16μm	B	709	371	625,675mm
325-032-02	700-800mm	18μm	B	809	426	725,775mm
325-036-02	800-900mm	20μm	B	909	476	825,875mm
325-040-02	900-1000mm	22μm	B	1009	576	925,975mm