Blade Calipers

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Specifications

Delivered	In a case

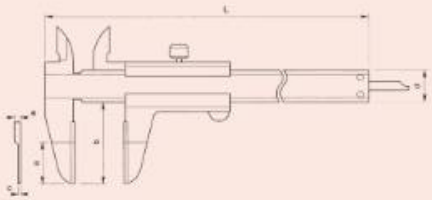

Series 573

A Mitutoyo waterproof digital caliper suitable for use in the presence of coolant or cutting oil.

Dust- and Water-Protected

- The outside measuring faces are carbide-tipped.

ABSOLUTE


IP67




573-634-20

Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
573-634-20	0–150	Flat	●	±0,02 mm	±0,04 mm	168
573-635-20	0–150	Flat		±0,02 mm	±0,04 mm	168




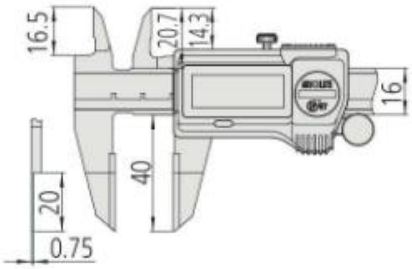

Series 536

These Blade Calipers have thin measuring jaws. They offer you the following benefits:

- The outside measuring faces are carbide-tipped.

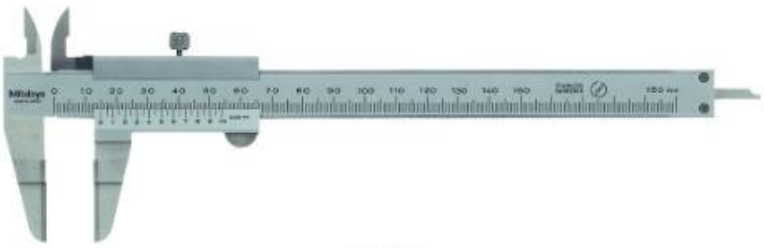

536-134

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]
536-134	0–150	0,05 mm	Flat	±0,05 mm	±0,07 mm	229	20	40	0,75	16	3
536-135	0–200	0,05 mm	Flat	±0,05 mm	±0,07 mm	286	25	50	0,75	16	3
536-136	0–300	0,05 mm	Flat	±0,08 mm	±0,1 mm	403	30	64	1	16	3,8

No.	Mass [g]
536-134	140
536-135	180
536-136	420

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo