Neck Calipers

Series 573

These neck calipers enable measurements in hard to reach places. They offer you the following benefits:

- You can measure wall thickness inside bores and recesses.

Dust- and Water-Protected

TÜVRheinland CERTIFIED

www.tuv.com ID 0000045042

ABSOLUTE®

IP67



573-651-20




573-652-20
Point jaw type

Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Mass [g]
573-651-20	0–150	Without	●	±0,03 mm	157
573-653-20	0–150	Without		±0,03 mm	157

Metric Point jaw type

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Mass [g]
573-652-20	0–150	Without	●	±0,03 mm	157
573-654-20	0–150	Without		±0,03 mm	157

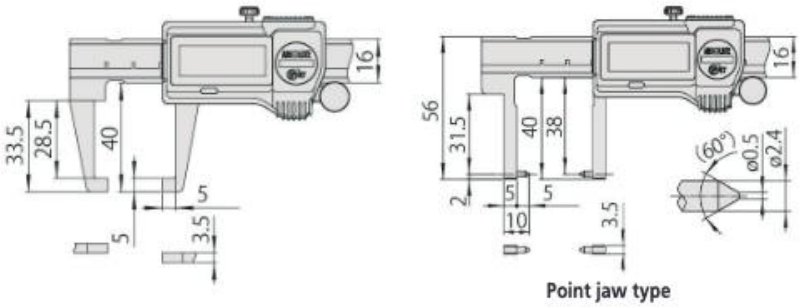

Point jaw type

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery


Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



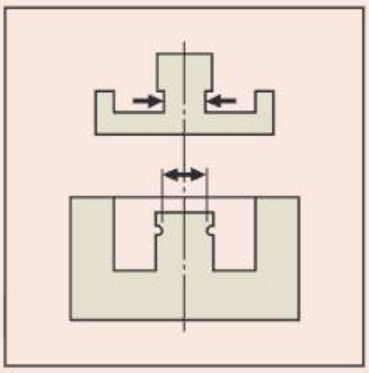

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.