Scribing Calipers with Carbide Tipped Jaws

Series 573

These Calipers are designed for scribing tasks.

Dust- and Water-Protected

ABSOLUTE

IP67



573-677-20

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm (150, 200 mm) 11 mm (300 mm)
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories


No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V

Metric

No.	Range [mm]	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Mass [g]
573-676-20	0–150	Flat	±0,02 mm	±0,04 mm	229	46	21,5	17	16	33	166
573-677-20	0–200	Flat	±0,02 mm	±0,04 mm	288	50	25	20,5	16	43	196
573-679-20	0–300	Flat	±0,03 mm	±0,05 mm	404	64	27,5	22	20	54	360

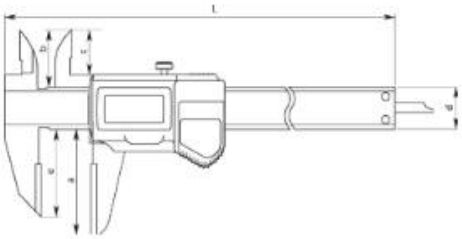

Series 536


These Calipers are designed for scribing tasks.



536-221

Specifications

Delivered	In a case

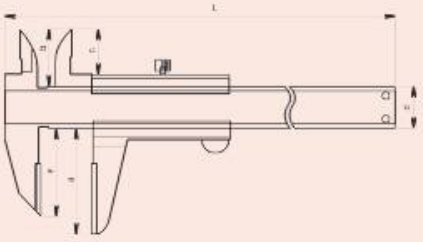

Metric

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]
536-221	0–150	0,05 mm	Flat	±0,05 mm	±0,07 mm	229	40	21,5	17	16	33
536-222	0–200	0,05 mm	Flat	±0,05 mm	±0,07 mm	288	50	25	20,5	16	43
536-223	0–300	0,05 mm	Flat	±0,08 mm	±0,1 mm	403	64	27,5	22	20	54

No.	Mass [g]
536-221	150
536-222	180
536-223	400

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.