Inside Calipers

Series 573

These inside calipers enable measurements inside a groove
They offer you the following benefits:
- Specially designed for measurements in hard-to-reach places.

Dust- and Water-Protected

ABSOLUTE

IP67

Functions	Series 573
ORIGIN (ABS-Zero)	●
Auto Power OFF after 20 min. non use	●
Low voltage alarm	●
Data output	●

Specifications

Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery


Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V







573-645-20




573-646-20
Point jaw type


Metric

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error S MPE	OFFSET	Mass [g]
573-645-20	10,1–160	Without	●	±0,05 mm	10 mm	147
573-647-20	10,1–160	Without		±0,05 mm	10 mm	147

Metric Point jaw type

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error S MPE	OFFSET	Mass [g]
573-646-20	20,1–170	Without	●	±0,03 mm	20 mm	157
573-648-20	20,1–170	Without		±0,03 mm	20 mm	157

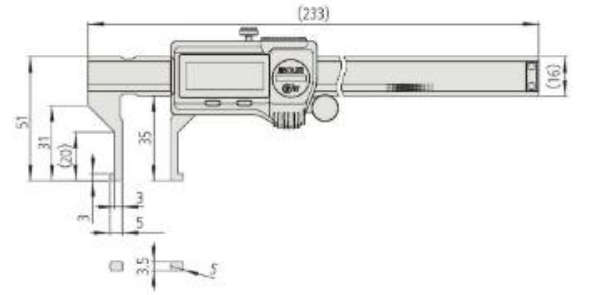

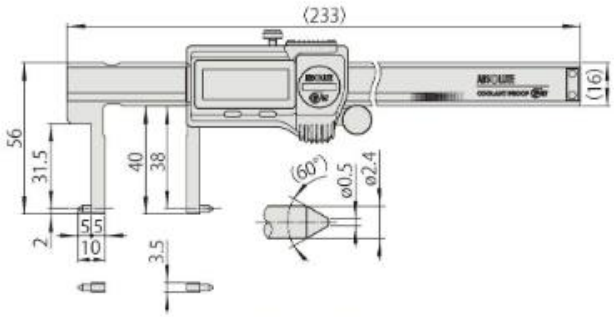

Point jaw type

All products to be sold to commercial customers.
Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

Mitutoyo