TRIMOS

V5 / V6

Height Gauges for the Workshop



Swiss Measuring Instruments

1.

INTRODUCTION

The vertical measuring instruments V5 and V6 are the descendants of the legendary V+ line, from which thousands of units have already been sold in workshops all over the world and are universally recognized for their easy use and their high quality.

Trimos was the first to offer vertical measuring instruments on the market more than 40 years ago. The V5 and V6 represent a consolidation of know-how accumulated over the years. The very legible display and the user-friendly functions offer exceptional comfort use. But that's not it: The V5 and V6 are equipped with a revolutionary displacement handwheel which offers its user the choice of the displacement mode of the measuring carriage, either manual or motor-driven. Each one of these modes, suffers from no compromise, which means that the user who prefers a manual instrument will not notice a difference with a classic manual instrument and the same applies to the motor-driven displacement. This innovation avoids having to make a difficult choice during the purchase and can accommodate multiple potential users with the same instrument.

- Measuring ranges 400, 700 and 1100 mm
- Extremely easy to use
- Electronically adjustable measuring force
- Manual or motor-driven displacement
- Standard probes up to 400 mm
- Vast range of accessories
- All adjustments possible without tools
- RS232 and USB interfaces
- Wireless data transfer (optional)



A Cast iron base for optimal stability

B Horizontal displacement handle with buttons for functions and air cushion

C Measuring carriage displacement handwheel. Manual or motor-driven mode.

D Interchangeable insert holder and probe

E Additional probe holder

F "Black Mask" display with user-friendly functions

G Easy balance adjustment system

2.

DIFFERENCES

V5
The design of the V5 with its side probe holders revives an old Trimos tradition: It enables measuring with long, robust probes guaranteeing an excellent repeatability.

V6
The V6 is of the same calibre as the V5. It's equipped with a more precise measuring system and enables the use of an electronic perpendicularity probe.

3.

TECHNICAL DATA

V5		400	700	1100
Measuring range	mm (in)	407 (16)	711 (28)	1110 (44)
Measuring range with extension	mm (in)	719 (28)	1023 (40)	1422 (56)
Max. permissible errors, B_{MPE}	µm	2.5 + L(mm)/300		
Repeatability, R_{MPE} (2s)	µm	2		
Frontal squareness deviation, S_{MPE}	µm	5	8	11
Maximal Resolution	mm (in)	0.0005 (0.00005)		
Measuring force	N	0.75 ÷ 1.5		
Autonomy	h	12		
Interfaces		USB / RS232 / Wireless		
Air cushion		Yes		
Weight	kg	21	24	33

V6		400	700	1100
Measuring range	mm (in)	407 (16)	711 (28)	1110 (44)
Measuring range with extension	mm (in)	719 (28)	1023 (40)	1422 (56)
Max. permissible errors, B_{MPE}	µm	2 + L(mm)/400		
Repeatability, R_{MPE} (2s)	µm	1 (Ø: 2)		
Frontal squareness deviation, S_{MPE}	µm	5	8	11
Maximal Resolution	mm (in)	0.0001 (0.000005)		
Measuring force	N	0.75 ÷ 1.5		
Autonomy	h	12		
Interfaces		USB / RS232 / Wireless		
Air cushion		Yes		
Weight	kg	21	24	33

The above values have been determined according to ISO 13225, with the standard measuring insert (TA-MI-101).

4.


APPLICATIONS AND FUNCTIONALITIES




Height Measurements
Measurements of height, thickness and chain of dimensions



Diameter Measurements
Simultaneous display of diameter and centerline




Min/Max/Delta
The motorization guarantees a perfectly constant measuring force



Perpendicularity
Squareness measurements with electronic probe (V6)




Long Probes
Standard measuring inserts up to 400 mm, with excellent repeatability



Handwheel
Instant switch from the manual to the motor-driven mode




Accessories
Very large range of accessories for any type of application



Interface
The data transfer via the USB, RS232 port or Wireless is very easy

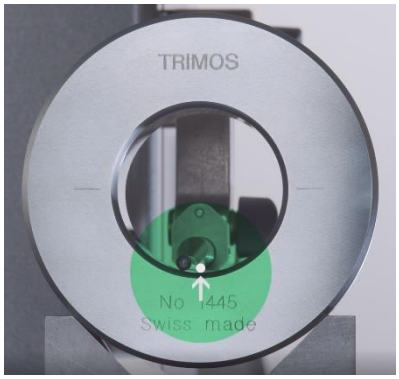SMART REVERSE Technology



SMART REVERSE:

Diameter measurement faster, more accurate and simpler

SmartReverse technology is the result of an intense collaboration between Trimos users and our R & D team in order to optimize diameter measurements.
SmartReverse makes the measurement of diameters very efficient by clearly indicating the reversal points with audible and visual signals. The user is guided precisely during the measurement of diameters, which generates a significant gain in speed and reliability of the measurement.

Trimos S.A.
Av.de Longemalle 5
CH-1020 Renens
T. +41 21 633 01 01
info@trimos.ch
www.trimos.com

V5 & V6



INTRODUCTION

The V5 and V6 come from the legendary V + height gauge family, which has been sold thousands of times in workshops worldwide and universally recognized for their ease of use and quality.

Trimos was the first to offer a vertical measuring instruments on the market more than 40 years ago. The V5 and V6 represent a concentrate of know-how accumulated during all these years. The easy-to-read display and intuitive functions offer exceptional user comfort. But that's not all: The V5 and V6 are equipped with a revolutionary displacement crank offering the user the choice of how to move the measuring carriage, either manual or motorized. Each of these modes does not suffer from any compromise, that is to say that the user preferring a manual instrument will note no difference compared to a conventional manual instrument, ditto for motorized movement. This innovation avoids making a difficult choice during the acquisition and makes it possible to satisfy the multiple potential users of the same instrument.

The design of the V5 with its lateral probe holders revives an old tradition of Trimos: Enable measurement with long sturdy keys while ensuring excellent repeatability.

The V6 is of the same calibre as the V5. It is equipped with a more precise measuring system and allows the use of an electronic probe of perpendicularity.

MEASURING RANGES 400, 700 AND 1100 MM
EXTREMELY SIMPLE USE
ELECTRONICALLY ADJUSTABLE MEASURING FORCE
MANUAL OR MOTORIZED DISPLACEMENT
STANDARD INSERTS UP TO 400 MM
VAST RANGE OF ACCESSORIES
ALL POSSIBLE ADJUSTMENTS WITHOUT TOOLS
RS232 AND USB INTERFACES

DESCRIPTION

- Heights
- Diameters
- Centreline distances
- Min / Max / Delta
- 9 references
- Perpendicularity
- Average
- Difference
- Temperature comp.
- Wireless communication



Upper probe holder

Floating probe suspension adjustment

Interchangeable insert and insert holder

"Black Mask" display with intuitive function keys

Handwheel for carriage displacement (manual/motorized)

Handle for instrument displacement with programmable function keys and air cushion button

Cast iron base for optimum stability

DISPLAY/SOFTWARE

Keyboard functions are represented by clear and intuitive symbols. The display on 2 lines offers the user a great working comfort.



- EXCELLENT CONTRAST WITH "BLACK MASK" DISPLAY
- MEASUREMENTS OF HEIGHTS OR DIAMETERS
- MIN / MAX / DELTA MEASURING MODES
- ZERO OR PRESET FUNCTION
- USB AND RS232 DATA OUTPUT
- 9 REFERENCES AVAILABLE
- GRAPHIC AND ACOUSTIC PROBE INDICATOR
- SMART REVERSE DIAMETER MEASUREMENT


TECHNICAL SPECIFICATIONS

V5		400	700	1100
Measuring range	mm (in)	407 (16)	711 (28)	1110 (44)
Application range	mm (in)	719 (28)	1023 (40)	1422 (56)
Max. permissible errors, B_{MPE}	µm	2.5 + L(mm)/300		
Repeatability, R_{MPE} (2s)	µm	2		
Perpendicularity deviation (frontal), S_{MPE}	µm	5	8	11
Max. resolution	mm (in)	0.0005 (0.00005)		
Measuring force	N	0.75 ÷ 1.5		
Autonomy	h	12		
Data output		USB / RS232 / Wireless (optional)		
Air cushion		Yes		
Weight	kg	21	24	33

V6		400	700	1100
Measuring range	mm (in)	407 (16)	711 (28)	1110 (44)
Application range	mm (in)	719 (28)	1023 (40)	1422 (56)
Max. permissible errors, B_{MPE}	µm	2 + L(mm)/400		
Repeatability, R_{MPE} (2s)	µm	1 (Ø: 2)		
Perpendicularity deviation (frontal), S_{MPE}	µm	5	8	11
Max. resolution	mm (in)	0.0001 (0.000005)		
Measuring force	N	0.75 ÷ 1.5		
Autonomy	h	12		
Data output		USB / RS232 / Wireless (optional)		
Air cushion		Yes		
Weight	kg	21	24	33

The above values have been determined according to ISO 13225, with the standard measuring insert (TA-MI-101).

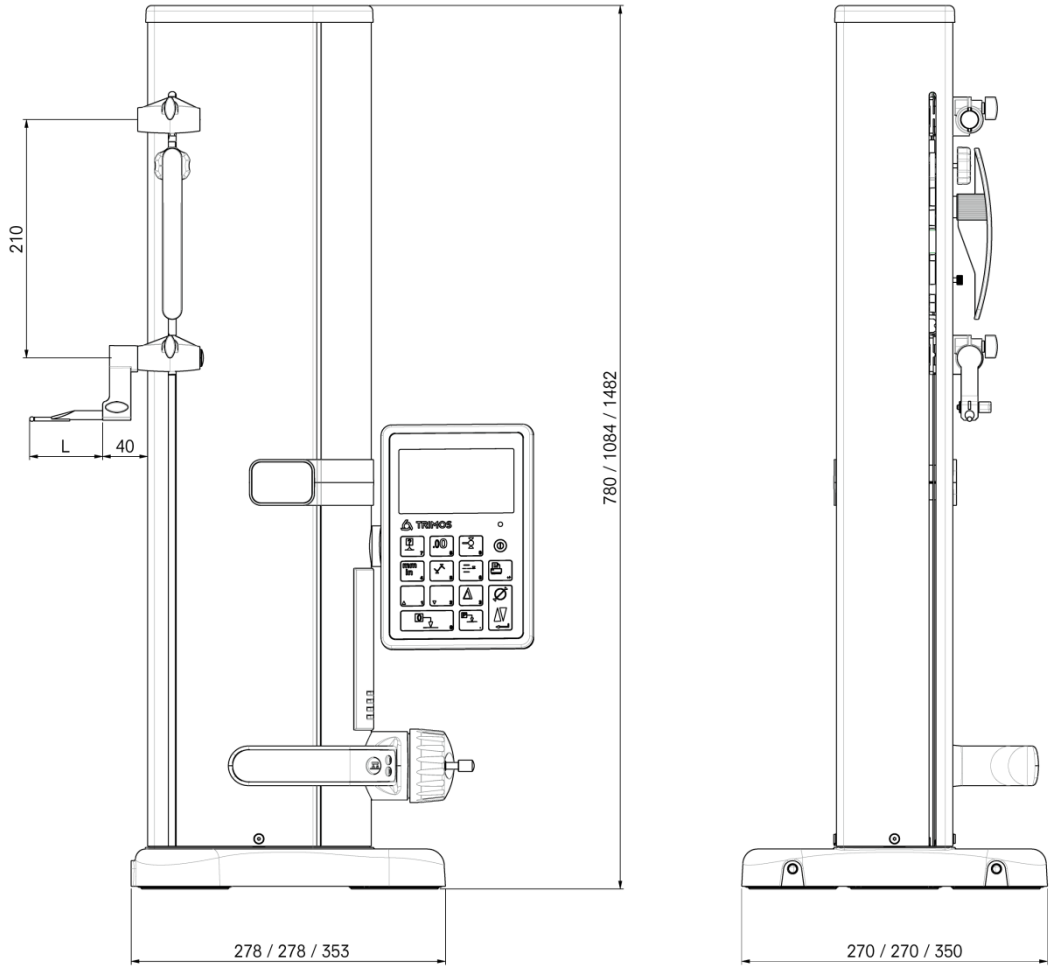DIAGRAM



L: depends on the measuring insert used


STANDARD INSTRUMENT

The V5 and V6 are supplied as follows	
Instrument according to specifications	Charging unit (TA-EL-132)
Measuring insert with ruby ball Ø 4 mm (TA-MI-101)	Setting gauge (TA-MG-104)
Protection cover (TA-TO-114/115/116)	User's manual (750 50 0045 03)
Calibration certificate	

ORDER NUMBERS

V5		V6		
V5-400	700 110 10 05	**V6-400**	700 110 10 06	Measuring range 400 mm
V5-700	700 110 20 05	**V6-700**	700 110 20 06	Measuring range 700 mm
V5-1100	700 110 30 05	**V6-1100**	700 110 30 06	Measuring range 1100 mm

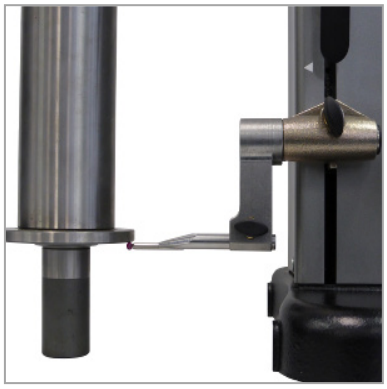APPLICATIONS




Measurements of height, thickness and chain of dimensions (TA-IH-135, TA-MI-101)



Simultaneous display of diameter and centreline (TA-IH-135, TA-MI-101)



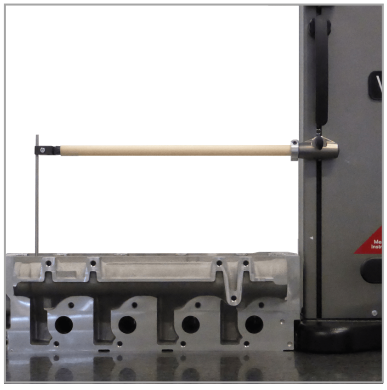Measurement of perpendicularity with electronic probe (V6) (TA-IH-136, TA-MS-101)




Standard measuring inserts up to 400 mm, with excellent repeatability (TA-IH-131, TA-AD-105, TA-IH-115, V-50.4)




Very large range of accessories for any type of application (TA-SE-106, TA-SE-102, TA-SE-105, TA-SE-107)



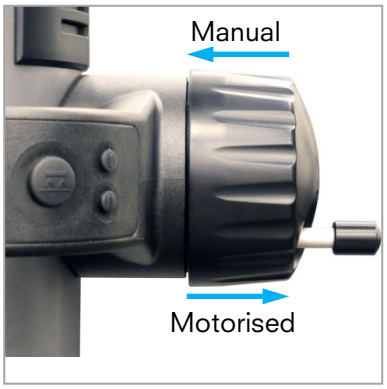
The instrument can be controlled remotely. This allows its integration into complex quality systems.



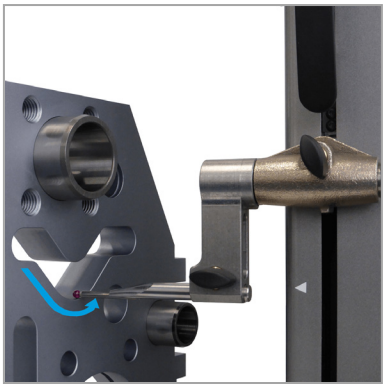Instant switch from the manual to the motor-driven mode



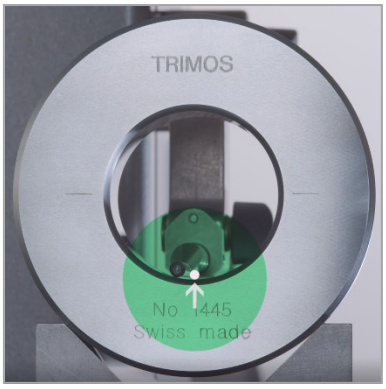The motorization guarantees a perfectly constant measuring force (TA-IH-135, TA-MI-101).













Very efficient diameter measurement thanks to SmartReverse technology











TRIMOS











Accessoires | Zubehör | Accessories











Instruments verticaux
Height gauges
Höhenmessgeräte











Swiss Measuring Instruments







			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TV2S2** 779 901007 002	Cône Ø0-15 mm Konus Ø0-15 mm Cone Ø0-15 mm	■								
	**TV2S3** 779 901007 003	Cône Ø13-20.5 mm Konus Ø13-20.5 mm Cone Ø13-20.5 mm	■								
	**TV2S4** 779 901007 004	Cône Ø17-24.5 mm Konus Ø17-24.5 mm Cone Ø17-24.5 mm	■								
	**TV2S5** 779 901007 005	Cône Ø23-30.5 mm Konus Ø23-30.5 mm Cone Ø23-30.5 mm	■								
	**TA-IH-138** 712 12 20 0010	Support de cônes Konushalter Cone support	■								
	**TA-MI-122** 709 12 10 0003	Traceur pour V1 Anreissnadel für V1 Scriber for V1	■								
	**TA-MI-121** 709 05 20 0124	Touche bille MD Ø6 mm pour V1+ Messeinsatz mit HM-Kugel Ø6 mm für V1+ Measuring insert with TC-Ball Ø6 mm for V1+	■								
	**TVM2.4** 709 05 20 0009	Touche à bille Ø2 mm, L=41.6 mm Kugel-Messeinsatz Ø2 mm, L=41.6 mm Ball insert Ø2 mm, L=41.6 mm	■								
	**TVM2.3** 709 05 20 0014	Touche à bille Ø3 mm, L=42.5 mm Kugel-Messeinsatz Ø3 mm, L=42.5 mm Ball insert Ø3 mm, L=42.5 mm	■								
	**TVM2.2** 709 05 20 0025	Touche à bille Ø4 mm, L=43.5 mm Kugel-Messeinsatz Ø4 mm, L=43.5 mm Ball insert Ø4 mm, L=43.5 mm	■								











			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TVM2.6** 709 05 20 0031	Touche à bille Ø5 mm, L=43.9 mm Kugel-Messeinsatz Ø5 mm, L=43.9 mm Ball insert Ø5 mm, L=43.9 mm	■								
	**TVM2** 709 05 20 0051	Touche à bille Ø8 mm, L=47.3 mm Kugel-Messeinsatz Ø8 mm, L=47.3 mm Ball insert Ø8 mm, L=47.3 mm	■								
	**TVM2.5** 709 05 20 0059	Touche à plateau Ø8 mm Zylindrischer Messeinsatz Ø8 mm Disc shaped insert Ø8 mm	■								
	**TVA9.1** 509 05 20 0011	Touche en tonneau M3-M16, L=55 mm Balliger Messeinsatz M3-M16, L=55 mm Barrel-shaped insert M3-M16, L=55 mm		■	■	■	■	■	■	■	■
	**TVA9.2** 509 05 20 0029	Touche en tonneau M6-M48, L=60 mm Balliger Messeinsatz M6-M48, L=60 mm Barrel-shaped insert M6-M48, L=60 mm		■	■	■	■	■	■	■	■
	**TVA9.3** 509 05 20 0062	Touche en tonneau M12-M150, L=60 mm Balliger Messeinsatz M12-M150, L=60 mm Barrel-shaped insert M12-M150, L=60 mm		■	■	■	■	■	■	■	■
	**TA-MI-111** 509 05 20 0078	Touche à bille métal dur Ø1 mm, L=75 mm Messeinsatz mit Hartmetall-Kugel Ø1 mm, L=75 mm Measuring insert with tungst. carb. ball, Ø1 mm, L=75 mm		■	■	■	■	■	■	■	■
	**TA-MI-110** 509 05 20 0077	Touche à bille en métal dur Ø2 mm, L=80 mm Messeinsatz mit Hartmetall-Kugel Ø2 mm, L=80 mm Measuring insert with tungst. carb. ball Ø2 mm, L=80 mm		■	■	■	■	■	■	■	■
	**TA-MI-104** 509 05 20 0080	Touche à bille métal dur Ø2 mm, L=130 mm Messeinsatz mit Hartmetall-Kugel Ø2 mm, L=130 mm Measuring insert with tungst. carb. ball Ø2mm, L=130 mm			■	■	■	■	■	■	■
	**TA-MI-120** SP509 05 20 0086	Touche à bille rubis Ø3 mm, L=90mm Messeinsatz mit Rubin-Kugel Ø3 mm, L=90mm Measuring insert with ruby ball Ø3 mm, L=90mm		■	■	■	■	■	■	■	■






			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-MI-102** 509 05 20 0075	Touche à bille métal dur Ø4mm, L=90 mm Messeinsatz mit Hartmetall-Kugel Ø4 mm, L=90 mm Measuring insert with tungst. carb. ball Ø4 mm, L=90 mm	■	■	■	■	■	■	■	■	■
	**TA-MI-105** 509 05 20 0079	Touche à bille métal dur, Ø4 mm, L=140 mm Messeinsatz mit Hartmetall-Kugel Ø4 mm, L=140 mm Measuring insert with tungst. carb. ball Ø4 mm, L=140 mm			■	■	■	■	■	■	■
	**TA-MI-106** 279 918011 004	Touche à bille rubis Ø5 mm, L=129 mm Messeinsatz mit Rubin-Kugel Ø5 mm, L=129 mm Measuring insert with ruby ball Ø5 mm, L=129 mm			■	■	■	■	■	■	■
	**TA-MI-101** 509 05 20 0074	Touche à bille rubis Ø4 mm, L=90 mm Messeinsatz mit Rubin-Kugel Ø4 mm, L=90 mm Measuring insert with ruby ball Ø4 mm, L=90 mm	■	■	■	■	■	■	■		
	**TA-MI-119** SP279 918011 005	Touche à bille rubis Ø5 mm, L=64 mm Messeinsatz mit Rubin-Kugel Ø5 mm, L=64 mm Measuring insert with ruby ball Ø5 mm, L=64 mm								■	■
	**TA-MI-107** 509 05 20 0081	Touche à goupille métal dur Ø1.5 mm, L=78 mm Zylindrischer Messeinsatz Ø1.5 mm, L=78 mm Measuring insert with pin Ø1.5 mm, L=78 mm		■	■	■	■	■	■	■	■
	**TA-MI-112** 509 05 20 0082	Touche à surfaces planes, 10 x 10 mm, L=90 mm Messeinsatz mit Parallel-Messflächen, 10 x 10 mm, L=90 mm Measuring insert with parallel faces, 10 x 10 mm, L=90 mm			■	■	■	■	■	■	■
	**TA-MI-108** 279 918011 002	Touche à bille rubis Ø10 mm, L=100 mm Messeinsatz mit Rubin-Kugel Ø10 mm, L=100 mm Measuring insert with ruby ball Ø10 mm, L=100 mm	■	■	■	■	■	■	■	■	■
	**TA-AD-101** 603 11 001	Bague de positionnement de touche Ø8 mm Positionierhalter für Messeinsatz Ø8 mm Positioning holder for measuring insert Ø8 mm		■	■	■	■	■	■	■	■
	**TA-MI-109** 279 918011 003	Touche à bille rubis Ø3 mm, L=87.5 mm Messeinsatz mit Rubin-Kugel Ø3 mm, L=87.5 mm Measuring insert with ruby ball Ø3 mm, L=87.5 mm			■	■	■	■	■	■	■








			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**V-50.10** 279 918007 001	Touche biseautée Abgeschrägter Messeinsatz Knife-edge insert			■	■	■	■	■	■	■
	**V-50.11** 279 918013 001	Touche en tonneau Ø3 x 5 mm, L = 89 mm Balliger Messeinsatz Ø3 x 5 mm, L = 89 mm Barrel-shaped insert Ø3 x 5 mm, L = 89 mm			■	■	■	■	■	■	■
	**V-50.12** 279 918012 001	Touche à bille Ø1 mm avec porte-touche, L=86 mm Kugel-Messeinsatz Ø1 mm mit Halter, L=86 mm Measuring insert Ø1 mm with holder, L=86 mm			■	■	■	■	■	■	■
	**TA-MI-114** 506 22 20 0063	Goupille, 1 face hémisphérique et 1 face plane, L=100 mm Stift, 1 halbkugelförmige und 1 flache Messfläche, L=100 mm Pin, 1 hemispheric and 1 plane face, L=100 mm	■	■	■	■	■	■	■	■	■
	**TA-MI-115** 279 901001 001	Touche M1.4 avec bille Ø1 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø1 mm, L=12,5 mm Measuring insert M1.4 with ball Ø1 mm, L=12.5 mm			■	■	■	■	■	■	■
	**TA-MI-116** 279 901001 002	Touche M1.4 avec bille Ø2 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø2 mm, L=12.5 mm Measuring insert M1.4 with ball Ø2 mm, L=12.5 mm			■	■	■	■	■	■	■
	**TA-MI-117** 279 901001 003	Touche M1.4 avec bille Ø3 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø3 mm, L=12.5 mm Measuring insert M1.4 with ball Ø3 mm, L=12.5 mm			■	■	■	■	■	■	■
	**V-50.4** 279 918010 001	Touche hémisphérique M2,5 Messeinsatz M2.5 mit kugelförmiger Messfläche Measuring insert M2,5 with ball contact	■	■	■	■	■	■	■	■	■
	**TA-MI-118** 279 901003 001	Touche M2.5 à 4 goupilles interchangeables, L=16/26/36/46 mm Messeinsatz M2.5 mit 4 wechselbaren Stiften, L=16/26/36/46 mm Measuring insert M2.5 with 4 interchangeable pins, L=16/26/36/46 mm	■	■	■	■	■	■	■	■	■
	**V-50.2.1** 279 918005 002	Touche à disque M2.5, Ø7.7 mm Diskförmiger Messeinsatz M2.5, Ø7.7 mm Disc-shaped inserts M2.5, Ø7.7 mm	■	■	■	■	■	■	■	■	■


			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**V-50.2.2** 279 918005 003	Touche à disque M2.5, Ø11.5 mm Diskförmiger Messeinsatz M2.5, Ø11.5 mm Disc-shaped insert M2.5, Ø11.5 mm	■	■	■	■	■	■	■	■	■
	**V-50.2.3** 279 918005 004	Touche à disque M2.5, Ø18 mm Diskförmiger Messeinsatz M2.5, Ø18 mm Disc-shaped inserts M2.5, Ø18 mm	■	■	■	■	■	■	■	■	■
	**V-50.2** 279 918005 001	Jeu de 3 touches à disque M2.5, Ø 7.7 / 11.5 / 18 mm Satz mit 3 Diskusförmigen Messeinsätzen M2.5, Ø 7.7 / 11.5 / 18 mm Set of 3 disc-shaped inserts M2.5, Ø 7.7 / 11.5 / 18 mm	■	■	■	■	■	■	■	■	■
	**V-50.3** 279 918008 001	Touche à pied M2.5 L-förmiger Messeinsatz M2.5 Corner insert M2.5	■	■	■	■	■	■	■	■	■
	**V-50.1** 279 918009 001	Touche M2.5 à bille rubis orientable Ø3 mm Messeinsatz M2.5 mit Rubin-Kugel Ø3 mm Measuring insert M2.5 with ruby ball Ø3 mm			■	■	■	■	■	■	■
	**TVM6** 512 11 20 0018	Porte-touche Ø8 mm pour touches M2.5 Halter Ø8 mm für Messeinsätze M2.5 Holder Ø8 mm for measuring inserts M2.5	■	■	■	■	■	■	■	■	■
	**TVM6E** 512 11 20 0019	Porte-touche Ø8 mm pour touches 4-48 Halter Ø8 mm für Messeinsätze 4-48 Holder Ø8 mm for measuring inserts 4-48	■	■	■	■	■	■	■	■	■
	**TA-IH-101** 612 11 045	Porte-touche M2.5, L=103 mm Messeinsatz-Halter M2.5, L=103 mm Measuring insert holder M2.5, L=103 mm	■	■	■	■	■	■	■	■	■
	**TA-IH-103** 612 11 047	Porte-touche 4-48, L=103 mm Messeinsatz-Halter 4-48, L=103 mm Measuring insert holder 4-48, L=103 mm	■	■	■	■	■	■	■	■	■
	**TA-IH-102** 612 11 046	Porte-touche M2.5, L=300 mm Messeinsatz-Halter M2.5, L=300 mm Measuring insert holder M2.5, L=300 mm								■	■

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-IH-119** 612 11 048	Porte-touche (")4-48, L=300mm Messeinsatz-Halter (")4-48, L=300mm Measuring insert holder (")4-48, L=300mm								■	■
	**TA-IH-104** 612 11 053	Porte-touche orientable Ø4 et Ø8 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm Swivel holder Ø4 and Ø8 mm		■						■	■
	**TA-IH-105** 612 11 051	Porte-touche orientable Ø4 et Ø8 mm, L=150 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm, L=150 mm Swivel holder Ø4 and Ø8 mm, L=150 mm								■	■
	**V-2E/D1/4/L1** 612 11 013	Porte-touche orientable Ø1/4 ", L=150 mm Orientabler Messeinsatz-Halter Ø1/4 ", L=150 mm Swivel holder Ø1/4 ", L=150 mm								■	■
	**TA-IH-106** 612 11 039	Porte-touche orientable Ø4 et Ø8 mm, L=300 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm, L=300 mm Swivel holder Ø4 and Ø8 mm, L=300 mm								■	■
	**TA-IH-107** 612 11 055	Porte-touche à 90°, Ø8 mm Messeinsatz-Halter 90°, Ø8 mm Insert holder 90°, Ø8 mm			■	■	■	■	■	■	■
	**TA-IH-108** 612 11 052	Porte-touche à 90°, Ø8 mm, L=150 mm Messeinsatz-Halter 90°, Ø8 mm, L=150 mm Insert holder 90°, Ø8 mm, L=150 mm			■	■	■	■	■	■	■
	**TA-IH-129** 612 11 040	Porte-touche orienté à 90°, Ø 8mm, L=300mm Messeinsatz-Halter, 90° geschwenkt, Ø 8mm, L=300mm Holder at 90°, Ø 8mm, L=300mm								■	■
	**TA-IH-109** 612 11 054	Porte-touche à 90°, Ø4 mm Messeinsatz-Halter 90°, Ø4 mm Insert holder 90°, Ø4 mm	■	■	■	■	■	■	■	■	■
	**V-4** 612 11 011	Porte-touche à 30°, Ø4 mm Messeinsatz-Halter 30°, Ø4 mm Insert holder 30°, Ø4 mm			■	■	■	■	■	■	■

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-IH-111** 612 11 041	Porte-touche à 90°, Ø4 mm, L=150 mm Messeinsatz-Halter 90°, Ø4 mm, L=150 mm Insert holder 90°, Ø4 mm, L=150 mm								■	■
	**TA-IH-112** 612 11 042	Porte-touche à 90°, Ø4 mm, L=300 mm Messeinsatz-Halter 90°, Ø4 mm, L=300 mm Insert holder 90°, Ø4 mm, L=300 mm								■	■
	**TVA4** 609 05 007	Porte-touche à tige Ø2 x 20 mm Messeinsatz-Halter mit Stift Ø 2 x 20 mm Insert holder with pin Ø2 x 20 mm	■	■	■	■	■	■	■	■	■
	**TA-IH-113** 612 11 043	Porte-touche à tige Ø2 x 20 mm, L=200 mm Messeinsatz mit Stift Ø2 x 20 mm, L=200 mm Insert holder with pin Ø2 x 20 mm, L=200 mm								■	■
	**TA-IH-114** 612 11 044	Porte-touche à tige Ø2 x 20 mm, L=300 mm Messeinsatz mit Stift Ø2 x 20 mm, L=300 mm Insert holder with pin Ø2 x 20 mm, L=300 mm								■	■
	**V-5** 612 11 012	Réduction Ø 8 / 4 mm Reduktion Ø 8 / 4 mm Reduction Ø 8 / 4 mm								■	■
	**TA-IH-135** 612 11 065	Porte-touche standard Ø8 mm Standard Messeinsatz-Halter Ø8 mm Standard insert holder Ø8 mm			■	■	■	■	■		
	**TA-IH-128** 612 11 067	Porte-touche Ø4 mm Messeinsatz-Halter Ø4 mm Measuring insert holder Ø4 mm			■	■	■	■	■		
	**TA-IH-137** SP612 11 065 01	Porte-touche Ø6 mm Messeinsatz-Halter Ø6 mm Measuring insert holder Ø6 mm			■	■	■	■	■		
	**TA-IH-130** 612 11 072	Porte-touche orientable Ø4 et Ø8 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm Swivel holder Ø4 and Ø8 mm			■	■	■	■	■		




			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-IH-139** 712 11 089	Porte-touche orientable Ø4 et Ø8 mm, L=148 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm, L=148 mm Swivel holder Ø4 and Ø8 mm, L=148 mm	■								
	**TA-IH-127** 612 11 066	Porte-touche Ø8 mm, L=400 mm Messeinsatz-Halter Ø8 mm, L=400 mm Insert holder Ø8 mm, L=400 mm			■	■	■	■	■		
	**TA-IH-131** 612 11 068	Porte-touche orientable Ø4 et Ø8 mm, L=400 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm, L=400 mm Swivel holder Ø4 and Ø8 mm, L=400 mm			■	■	■	■	■		
	**TA-IH-132** 612 11 069	Porte-touche 90°, Ø4 mm, L=400 mm Messeinsatz-Halter 90°, Ø4 mm, L=400 mm Insert holder 90°, Ø4 mm, L=400 mm			■	■	■	■	■		
	**TA-IH-133** 612 11 070	Porte-touche à tige Ø2 x 20 mm, L=400 mm Messeinsatz-Halter mit Stift Ø 2 x 20 mm, L=400 mm Insert holder with pin Ø2 x 20 mm, L=400 mm			■	■	■	■	■		
	**TA-IH-134** 612 11 071	Porte-touche M2.5, L=400 mm Messeinsatz-Halter M2.5, L=400 mm Measuring insert holder M2.5, L=400 mm			■	■	■	■	■		
	**TA-AD-105** 603 11 003	Bague de positionnement de touche Ø15 mm Positionierhalter für Messeinsatz Ø15 mm Positioning holder for measuring insert Ø15 mm			■	■	■	■	■		
	**V-50.6** 279 918002 002	Porte-touche M2.5, L=80 mm Messeinsatz-Halter M2.5, L=80 mm Measuring insert holder M2.5, L=80 mm	■	■	■	■	■	■	■	■	■
	**V-50.5** 279 918002 001	Porte-touche M2.5, L=124 mm Messeinsatz-Halter M2.5, L=124 mm Measuring insert holder M2.5, L=124 mm	■	■	■	■	■	■	■	■	■
	**TA-IH-115** 279 918002 003	Porte-touche M2.5, L=200 mm Messeinsatz-Halter M2.5, L=200 mm Measuring insert holder M2.5, L=200 mm			■	■	■	■	■	■	■

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**V-50.7** 279 918001 002	Porte-touche à 90°, M2.5 Messeinsatz-Halter 90°, M2.5 Insert holder 90°, M2.5			■	■	■	■	■	■	■
	**V-50.8** 279 918001 001	Porte-touche à 90°, Ø4 mm Messeinsatz-Halter 90°, Ø4 mm Insert holder 90°, Ø4 mm			■	■	■	■	■	■	■
	**TA-IH-116** 279 918001 003	Porte-touche à tige, Ø1 x 10 mm, L=80 mm Messeinsatz mit Stift, Ø1 x 10 mm, L=80 mm Measuring insert holder, Ø1 x 10 mm, L=80 mm			■	■	■	■	■	■	■
	**TA-IH-117** 512 11 20 0012	Porte-touche pour touches M2.5, M1.6, M1.4 Halter für Messeinsätze M2.5, M1.6, M1.4 Holder for measuring inserts M2.5, M1.6, M1.4			■	■	■	■	■	■	■
	**TA-IH-118** 512 11 20 0013	Porte-touche pour touches 4-48, M1.6, M1.4 Halter für Messeinsätze 4-48, M1.6, M1.4 Holder for measuring inserts 4-48, M1.6, M1.4			■	■	■	■	■	■	■
	**TA-IH-136** 712 11 073	Porte-touche Ø8 mm, L=200 mm, Support pour palpeur de perpendicularité Messeinsatz-Halter Ø8 mm, L=200 mm, Halter für Rechtwinkligkeitstaster Insert holder Ø8 mm, L=200 mm, Holder for perpendicularity probe			■	■	■	■	■		
	**TA-IH-126** 612 07 006	Support pour palpeur de perpendicularité Halter für Rechtwinkligkeitstaster Holder for perpendicularity probe								■	■
	**TA-MS-101** 276 940001 001	Palpeur de perpendicularité pour V6/V7/V8/V9-400/700, (sans support - V6/V7: TA-IH-136 & Rechtwinkligkeitstaster für V6/V7/V8/V9-400/700, (ohne Halter - V6/V7: TA-IH-136 & V8/V9: TA-IH-126) Perpendicularity probe for V6/V7/V8/V9-400/700, (without support - V6/V7: TA-IH-136 & V8/V9: TA-IH-						■	■	■	■
	**TA-MS-102** 276 940001 002	Palpeur de perpendicularité pour V6/V7/V8/V9-1100, (sans support - V6/V7: TA-IH-136 & V8/V9: Rechtwinkligkeitstaster für V6/V7/V8/V9-1100, (ohne Halter - V6/V7: TA-IH-136 & V8/V9: TA-IH-126) Perpendicularity probe for V6/V7/V8/V9-1100, (without support - V6/V7: TA-IH-136 & V8/V9: TA-IH-						■	■	■	■
	**TA-MS-104** 609 02 021	Palpeur de perpendicularité pour V7-1800, (sans support TA-IH-136) Rechtwinkligkeitstaster für V7-1800, (ohne Halter TA-IH-136) Perpendicularity probe for V7-1800, (without support TA-IH-136)							■		

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-SU-101** 740 02 001	Paire de vis d'appui pour base V4 ÷ V9 Paar Stützschrauben für Gerätebasis V4 ÷ V9 Pair of abutment screw for instrument base V4 ÷ V9				■	■	■	■	■	■
	**TA-SE-106** 605 01 022	Jeux d'accessoires "Macro" (16 pcs) Zubehörsatz "Macro" (16 Stk.) Set of accessories "Macro" (16 pcs)			■	■	■	■	■	■	■
	**TA-SE-102** 605 01 008	Jeux d'accessoires "Micro" (20 pcs) Zubehörsatz "Micro" (20 Stk.) Set of accessories "Micro" (20 pcs)								■	■
	**TA-SE-105** 605 01 023	Jeux d'accessoires "Micro" (20 pcs) Zubehörsatz "Micro" (20 Stk.) Set of accessories "Micro" (20 pcs)			■	■	■	■	■		
	**TA-SE-107** 605 01 024	Jeux d'accessoires "Eco" (7 pcs) Zubehörsatz "Eco" (7 Stk.) Set of accessories "Eco" (7 pcs)			■	■	■	■	■	■	■
	**TA-MG-104** 609 01 032	Jauge d'étalonnage 25 mm Einstellehre 25 mm Setting gauge 25 mm			■	■	■	■	■	■	■
	**TA-MG-105** SP609 01 032 02	Bloc d'étalonnage avec hauteur et diamètre, H=100 mm Einstell-Lehre mit Höhe und Durchmesser, H=100 mm Setting gauge with height and diameter, H=100 mm		■	■	■	■	■	■	■	■
	**TA-MG-107** 709 01 037	Jauge d'étalonnage 4 mm Einstellehre 4 mm Setting gauge 4 mm	■	■							
	**TA-SU-102** SP609 40 040 03	Support pour mesure de bague-étalon TA-MG-001, (sans bague) Messständer für Einstellring TA-MG-001, (ohne Ring) Measuring stand for master ring gauge TA-MG-001, (without ring)	■	■	■	■	■	■	■	■	■
	**TA-TO-102** 614 00 007	Pièce de démonstration Vorführungsteil Demonstration piece	■	■	■	■	■	■	■	■	■

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**V-60** 712 12 045	Support de rangement pour accessoires Zubehör-Ablagefach Wooden accessories support	■	■	■	■	■	■	■	■	■
	**V-50.13** 290 918001 001	Clé pour touche comparateur à levier Schlüssel für Fühlhebelmesseinsatz Wrench for measuring inserts			■	■	■	■	■	■	■
	**TA-TO-118** 705 05 10 0009	Housse de protection pour V1/V1+ 300 mm Schutzhülle für V1/V1+ 300 mm Protection cover for V1/V1+ 300 mm	■								
	**TA-TO-119** 705 05 10 0011	Housse de protection pour V1/V1+ 600 mm Schutzhülle für V1/V1+ 600 mm Protection cover for V1/V1+ 600 mm	■								
	**TA-TO-114** 505 05 10 0041	Housse de protection pour V2 ÷ V9 - 400 Schutzhaube für V2 ÷ V9 - 400 Protection cover for V2 ÷ V9 - 400		■	■	■	■	■	■	■	■
	**TA-TO-115** 505 05 10 0042	Housse de protection pour V2 ÷ V9 - 700 Schutzhaube für V2 ÷ V9 - 700 Protection cover for V2 ÷ V9 - 700		■	■	■	■	■	■	■	■
	**TA-TO-116** 505 05 10 0043	Housse de protection pour V5 ÷ V9 - 1100 Schutzhaube für V5 ÷ V9 - 1100 Protection cover for V5 ÷ V9 - 1100					■	■	■	■	■
	**TA-TO-117** 505 05 10 0044	Housse de protection pour V7 - 1800 Schutzhaube für V7 - 1800 Protection cover for V7 - 1800							■		
	**TA-EL-112** 716 20 001	Câble pour connexion RS232-PC Kabel für RS232-PC-Verbindung Cable for RS232-PC connection	■	■	■	■	■	■	■	■	■
	**TA-EL-013** 332 02 0001	Câble de liaison USB A-B, L=1.8 m Verbindungskabel, USB A-B, L=1.8 m USB A-B connection cable, L=1.8 m							■		■

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-EL-014** 332 02 0002	Câble de liaison USB A-Mini B, L=1.8m Verbindunskabel, USB A-Mini B, L=1.8m USB A-Mini B connection cable, L=1.8m		■	■	■	■	■		■	
	**TA-EL-022** 716 35 008	Système de transmission de données sans fil, 1 x dongle pour l'Instrument & 1 x dongle USB pour PC Drahtloses Datenübertragungssysstem, 1 x Dongle für das Instrument & 1 x USB-Dongle für PC Wireless data transmission system, 1 x dongle for the instrument & 1 x USB dongle for PC				■	■	■	■	■	■
	**TA-EL-032** 756 0018	Imprimante thermique avec support, chargeur et câble RS232, (Pour V3 ÷ V6) Thermodrucker mit Halter, Ladegerät und RS232-Kabel, (für V3 ÷ V6) Thermal printer with holder, AC adapter and RS232 cable, (for V3 ÷ V6)		■	■	■	■	■		■	
	**TA-EL-033** 756 0020	Imprimante thermique avec support, chargeur et câble RS232, (Pour V7 & V9) Thermodrucker mit Halter, Ladegerät und RS232-Kabel, (für V7 & V9) Thermal printer with holder, AC adapter and RS232 cable, (for V7 & V9)							■		■
	**V-30.7** 788 000001 001	Rouleaux de papier (5 pces) pour imprimante thermique Papierrollen (5 Stk.) für Thermodrucker Paper rolls (5 pces) for thermal printer		■	■	■	■	■	■	■	■
	**TA-EL-063** 3704 0024	Batterie pour imprimante TA-EL-032 & TA-EL-033 Batteriesatz für Drucker TA-EL-032 & TA-EL-033 Battery pack for printer TA-EL-032 & TA-EL-033		■	■	■	■	■	■	■	■
	**TA-EL-016** 332 08 0001	Câble de connection instrument-affichage 0.23 m (HDMI) Verbindungskabel Instrument-Anzeige 0.23 m (HDMI-Stecker) Connection cable Instrument-Display 0.23 m (HDMI)		■	■	■	■	■	■	■	■
	**TA-EL-132** 716 70 010	Convertisseur AC/DC 240/24V - 3,0 A (36 W) AC/DC-Wandler 240/24V - 3,0 A (36 W) Converter AC/DC 240/24V - 3,0 A (36 W)		■	■	■	■	■		■	
	**TA-EL-133** 716 70 009	Convertisseur AC/DC 100-240V/12V - 2.5A (avec adaptateur) Netzgerät AC/DC 100-240V/12V - 2.5A (mit adapter) Adapter AC/DC 100-240V/12V - 2.5A (with adapter)							■		■
	**TA-EL-060** 3704 0021	Accumulateur pour V2, V3, V4, V5, V6 & V8, (Li-ion 7,2V - 2600mA/h) Batteriesatz für V2, V3, V4, V5, V6 & V8, (Li-ion 7,2V - 2600mA/h) Battery pack for V2, V3, V4, V5, V6 & V8, (Li-ion 7,2V - 2600mA/h)		■	■	■	■	■		■	

			V1	V2	V3	V4	V5	V6	V7	V8	V9
	**TA-EL-061** 3704 0022	Accumulateur pour V7 & V9, (Li-ion 7,2V - 10,4A/h) Batteriesatz für V7 & V9, (Li-ion 7,2V - 10,4A/h) Battery pack for V7 & V9, (Li-ion 7,2V - 10,4A/h)							■		■
	**TA-EL-062** 3705 0005	Pile de sauvegarde (CR1632) Pufferbatterie (CR1632) Back-up battery (CR1632)							■		■
	**BAT-TVM.OPT** 3705 0002	Pile (CR2032) Batterie (CR2032) Battery (CR2032)	■								
	**TA-SW-002** 394 1 0051	Logiciel de communication (TrimosDataTransfer) Software für Datenübertragung (TrimosDataTransfer) Software for data transfer (TrimosDataTransfer)		■	■	■	■	■	■	■	■
	**TA-SW-003** 394 1 0052	Logiciel de communication (TrimosDataTransfer Advanced), avec création de port COM virtuel Software für Datenübertragung (TrimosDataTransfer Advanced), mit virtueller Software for data transfer (TrimosDataTransfer Advanced), with virtual COM-port creation				■	■	■	■	■	■

TRIMOS SA
Av. de Longemalle 5
CH-1020 Renens
T. +41 21 633 01 01
www.trimos.com

Contenu des jeux d'accessoires
Inhalt der Zubehörsätze
Content of Accessory Sets












V3 ÷ V9



TA-SE-102
605 01 008

Jeux d'accessoires "Micro" (20 pcs)
Zubehörsatz "Micro" (20 Stk.)
Set of accessories "Micro" (20 pcs)

V3 V4 V5 V6 V7 V9
■


	**TA-IH-104** 612 11 053	Porte-touche orientable Ø4 et Ø8 mm Orientabler Messeinsatz-Halter Ø4 und Ø8 mm Swivel holder Ø4 and Ø8 mm
	**V-5** 612 11 012	Reduction Ø 8 / 4 mm Reduktion Ø 8 / 4 mm Reduction Ø 8 / 4 mm
	**V-50.6** 279 918002 002	Porte-touche M2.5, L=80 mm Messeinsatz-Halter M2.5, L=80 mm Measuring insert holder M2.5, L=80 mm
	**V-50.8** 279 918001 001	Porte-touche à 90°, Ø4 mm Messeinsatz-Halter 90°, Ø4 mm Insert holder 90°, Ø4 mm
	**TA-IH-116** 279 918001 003	Porte-touche à tige, Ø1 x 10 mm, L=80 mm Messeinsatz mit Stift, Ø1 x 10 mm, L=80 mm Measuring insert holder, Ø1 x 10 mm, L=80 mm
	**TA-IH-117** 512 11 20 0012	Porte-touche pour touches M2.5, M1.6, M1.4 Halter für Messeinsätze M2.5, M1.6, M1.4 Holder for measuring inserts M2.5, M1.6, M1.4
	**TA-MI-109** 279 918011 003	Touche à bille rubis Ø3 mm, L=87.5 mm Messeinsatz mit Rubin-Kugel Ø3 mm, L=87.5 mm Measuring insert with ruby ball Ø3 mm, L=87.5 mm
	**V-50.10** 279 918007 001	Touche biseautée Abgeschrägter Messeinsatz Knife-edge insert
	**V-50.12** 279 918012 001	Touche à bille Ø1 mm avec porte-touche, L=86 mm Kugel-Messeinsatz Ø1 mm mit Halter, L=86 mm Measuring insert Ø1 mm with holder, L=86 mm
	**TA-MI-115** 279 901001 001	Touche M1.4 avec bille Ø1 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø1 mm, L=12,5 mm Measuring insert M1.4 with ball Ø1 mm, L=12.5 mm
	**TA-MI-116** 279 901001 002	Touche M1.4 avec bille Ø2 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø2 mm, L=12.5 mm Measuring insert M1.4 with ball Ø2 mm, L=12.5 mm
	**TA-MI-117** 279 901001 003	Touche M1.4 avec bille Ø3 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø3 mm, L=12.5 mm Measuring insert M1.4 with ball Ø3 mm, L=12.5 mm



TA-SE-102
605 01 008


Jeux d'accessoires "Micro" (20 pcs)
Zubehörsatz "Micro" (20 Stk.)
Set of accessories "Micro" (20 pcs)

V3	V4	V5	V6	V7	V9
					■




V-50.4
279 918010 001

Touche hémisphérique M2,5
Messeinsatz M2.5 mit kugelförmiger Messfläche
Measuring insert M2,5 with ball contact




TA-MI-118
279 901003 001

Touche M2.5 à 4 goupilles interchangeables, L=16/26/36/46 mm
Messeinsatz M2.5 mit 4 wechselbaren Stiften, L=16/26/36/46 mm
Measuring insert M2.5 with 4 interchangeable pins, L=16/26/36/46 m




V-50.2.1
279 918005 002

Touche à disque M2.5, Ø7.7 mm
Diskförmiger Messeinsatz M2.5, Ø7.7 mm
Disc-shaped inserts M2.5, Ø7.7 mm



V-50.2.2
279 918005 003

Touche à disque M2.5, Ø11.5 mm
Diskförmiger Messeinsatz M2.5, Ø11.5 mm
Disc-shaped insert M2.5, Ø11.5 mm



V-50.3
279 918008 001

Touche à pied M2.5
L-förmiger Messeinsatz M2.5
Corner insert M2.5



V-50.13
290 918001 001

Clé pour touche comparateur à levier
Schlüssel für Fühlhebelmesseinsatz
Wrench for measuring inserts



TA-TO-003
290 000911 003

Clé coudée pour vis à 6 pans intérieurs 1.5 mm
Inbusschlüssel 1.5 mm
Allen key 1.5 mm



V-50.15
290 000911 005


Clé coudée pour vis à 6 pans intérieurs 2.5 mm
Inbusschlüssel 2.5 mm
Allen key 2.5 mm



TA-SE-105
605 01 023

Jeux d'accessoires "Micro" (20 pcs)
Zubehörsatz "Micro" (20 Stk.)
Set of accessories "Micro" (20 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	



TA-IH-104
612 11 053











Porte-touche orientable Ø4 et Ø8 mm
Orientabler Messeinsatz-Halter Ø4 und Ø8 mm
Swivel holder Ø4 and Ø8 mm



TA-SE-105
605 01 023

Jeux d'accessoires "Micro" (20 pcs)
Zubehörsatz "Micro" (20 Stk.)
Set of accessories "Micro" (20 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	


	**TA-IH-128** 612 11 067	Porte-touche Ø4 mm Messeinsatz-Halter Ø4 mm Measuring insert holder Ø4 mm
	**V-50.6** 279 918002 002	Porte-touche M2.5, L=80 mm Messeinsatz-Halter M2.5, L=80 mm Measuring insert holder M2.5, L=80 mm
	**V-50.8** 279 918001 001	Porte-touche à 90°, Ø4 mm Messeinsatz-Halter 90°, Ø4 mm Insert holder 90°, Ø4 mm
	**TA-IH-116** 279 918001 003	Porte-touche à tige, Ø1 x 10 mm, L=80 mm Messeinsatz mit Stift, Ø1 x 10 mm, L=80 mm Measuring insert holder, Ø1 x 10 mm, L=80 mm
	**TA-IH-117** 512 11 20 0012	Porte-touche pour touches M2.5, M1.6, M1.4 Halter für Messeinsätze M2.5, M1.6, M1.4 Holder for measuring inserts M2.5, M1.6, M1.4
	**TA-MI-109** 279 918011 003	Touche à bille rubis Ø3 mm, L=87.5 mm Messeinsatz mit Rubin-Kugel Ø3 mm, L=87.5 mm Measuring insert with ruby ball Ø3 mm, L=87.5 mm
	**V-50.10** 279 918007 001	Touche biseautée Abgeschrägter Messeinsatz Knife-edge insert
	**V-50.12** 279 918012 001	Touche à bille Ø1 mm avec porte-touche, L=86 mm Kugel-Messeinsatz Ø1 mm mit Halter, L=86 mm Measuring insert Ø1 mm with holder, L=86 mm
	**TA-MI-115** 279 901001 001	Touche M1.4 avec bille Ø1 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø1 mm, L=12,5 mm Measuring insert M1.4 with ball Ø1 mm, L=12.5 mm
	**TA-MI-116** 279 901001 002	Touche M1.4 avec bille Ø2 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø2 mm, L=12.5 mm Measuring insert M1.4 with ball Ø2 mm, L=12.5 mm
	**TA-MI-117** 279 901001 003	Touche M1.4 avec bille Ø3 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø3 mm, L=12.5 mm Measuring insert M1.4 with ball Ø3 mm, L=12.5 mm
	**V-50.4** 279 918010 001	Touche hémisphérique M2,5 Messeinsatz M2.5 mit kugelförmiger Messfläche Measuring insert M2,5 with ball contact



TA-SE-105
605 01 023


Jeux d'accessoires "Micro" (20 pcs)
Zubehörsatz "Micro" (20 Stk.)
Set of accessories "Micro" (20 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	




TA-MI-118
279 901003 001

Touche M2.5 à 4 goupilles interchangeables, L=16/26/36/46 mm
Messeinsatz M2.5 mit 4 wechselbaren Stiften, L=16/26/36/46 mm
Measuring insert M2.5 with 4 interchangeable pins, L=16/26/36/46 m




V-50.2.1
279 918005 002

Touche à disque M2.5, Ø7.7 mm
Diskförmiger Messeinsatz M2.5, Ø7.7 mm
Disc-shaped inserts M2.5, Ø7.7 mm



V-50.2.2
279 918005 003

Touche à disque M2.5, Ø11.5 mm
Diskförmiger Messeinsatz M2.5, Ø11.5 mm
Disc-shaped insert M2.5, Ø11.5 mm



V-50.3
279 918008 001

Touche à pied M2.5
L-förmiger Messeinsatz M2.5
Corner insert M2.5



V-50.13
290 918001 001

Clé pour touche comparateur à levier
Schlüssel für Fühlhebelmesseinsatz
Wrench for measuring inserts



TA-TO-003
290 000911 003

Clé coudée pour vis à 6 pans intérieurs 1.5 mm
Inbusschlüssel 1.5 mm
Allen key 1.5 mm



V-50.15
290 000911 005

Clé coudée pour vis à 6 pans intérieurs 2.5 mm
Inbusschlüssel 2.5 mm
Allen key 2.5 mm



TA-SE-106
605 01 022


Jeux d'accessoires "Macro" (16 pcs)
Zubehörsatz "Macro" (16 Stk.)
Set of accessories "Macro" (16 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	■



TA-IH-101
612 11 045

Porte-touche M2.5, L=103 mm
Messeinsatz-Halter M2.5, L=103 mm
Measuring insert holder M2.5, L=103 mm



TA-IH-105
612 11 051









Porte-touche orientable Ø4 et Ø8 mm, L=150 mm
Orientabler Messeinsatz-Halter Ø4 und Ø8 mm, L=150 mm
Swivel holder Ø4 and Ø8 mm, L=150 mm



TA-SE-106
605 01 022

Jeux d'accessoires "Macro" (16 pcs)
Zubehörsatz "Macro" (16 Stk.)
Set of accessories "Macro" (16 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	■

	**TA-IH-109** 612 11 054	Porte-touche à 90°, Ø4 mm Messeinsatz-Halter 90°, Ø4 mm Insert holder 90°, Ø4 mm
	**TVA4** 609 05 007	Porte-touche à tige Ø2 x 20 mm Messeinsatz-Halter mit Stift Ø 2 x 20 mm Insert holder with pin Ø2 x 20 mm
	**V-50.5** 279 918002 001	Porte-touche M2.5, L=124 mm Messeinsatz-Halter M2.5, L=124 mm Measuring insert holder M2.5, L=124 mm
	**TA-IH-115** 279 918002 003	Porte-touche M2.5, L=200 mm Messeinsatz-Halter M2.5, L=200 mm Measuring insert holder M2.5, L=200 mm
	**TA-MI-110** 509 05 20 0077	Touche à bille en métal dur Ø2 mm, L=80 mm Messeinsatz mit Hartmetall-Kugel Ø2 mm, L=80 mm Measuring insert with tungst. carb. ball Ø2 mm, L=80 mm
	**TA-MI-105** 509 05 20 0079	Touche à bille métal dur, Ø4 mm, L=140 mm Messeinsatz mit Hartmetall-Kugel Ø4 mm, L=140 mm Measuring insert with tungst. carb. ball Ø4 mm, L=140 mm
	**TA-MI-107** 509 05 20 0081	Touche à goupille métal dur Ø1.5 mm, L=78 mm Zylindrischer Messeinsatz Ø1.5 mm, L=78 mm Measuring insert with pin Ø1.5 mm, L=78 mm
	**TA-MI-115** 279 901001 001	Touche M1.4 avec bille Ø1 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø1 mm, L=12,5 mm Measuring insert M1.4 with ball Ø1 mm, L=12.5 mm
	**TA-MI-116** 279 901001 002	Touche M1.4 avec bille Ø2 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø2 mm, L=12.5 mm Measuring insert M1.4 with ball Ø2 mm, L=12.5 mm
	**TA-MI-117** 279 901001 003	Touche M1.4 avec bille Ø3 mm, L=12.5 mm Fühlhebelmesseinsatz M1.4 mit Kugel Ø3 mm, L=12.5 mm Measuring insert M1.4 with ball Ø3 mm, L=12.5 mm
	**V-50.4** 279 918010 001	Touche hémisphérique M2,5 Messeinsatz M2.5 mit kugelförmiger Messfläche Measuring insert M2,5 with ball contact
	**V-50.2.3** 279 918005 004	Touche à disque M2.5, Ø18 mm Diskförmiger Messeinsatz M2.5, Ø18 mm Disc-shaped inserts M2.5, Ø18 mm



TA-SE-106
605 01 022

Jeux d'accessoires "Macro" (16 pcs)
Zubehörsatz "Macro" (16 Stk.)
Set of accessories "Macro" (16 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	■



V-50.13
290 918001 001

Clé pour touche comparateur à levier
Schlüssel für Fühlhebelmesseinsatz
Wrench for measuring inserts



V-50.15
290 000911 005

Clé coudée pour vis à 6 pans intérieurs 2.5 mm
Inbusschlüssel 2.5 mm
Allen key 2.5 mm



TA-SE-107
605 01 024


Jeux d'accessoires "Eco" (7 pcs)
Zubehörsatz "Eco" (7 Stk.)
Set of accessories "Eco" (7 pcs)

V3	V4	V5	V6	V7	V9
■	■	■	■	■	■



TA-IH-109
612 11 054

Porte-touche à 90°, Ø4 mm
Messeinsatz-Halter 90°, Ø4 mm
Insert holder 90°, Ø4 mm




TVA4
609 05 007

Porte-touche à tige Ø2 x 20 mm
Messeinsatz-Halter mit Stift Ø 2 x 20 mm
Insert holder with pin Ø2 x 20 mm




V-50.5
279 918002 001

Porte-touche M2.5, L=124 mm
Messeinsatz-Halter M2.5, L=124 mm
Measuring insert holder M2.5, L=124 mm




TA-MI-110
509 05 20 0077

Touche à bille en métal dur Ø2 mm, L=80 mm
Messeinsatz mit Hartmetall-Kugel Ø2 mm, L=80 mm
Measuring insert with tungst. carb. ball Ø2 mm, L=80 mm



V-50.4
279 918010 001

Touche hémisphérique M2,5
Messeinsatz M2.5 mit kugelförmiger Messfläche
Measuring insert M2,5 with ball contact



V-50.3
279 918008 001

Touche à pied M2.5
L-förmiger Messeinsatz M2.5
Corner insert M2.5



V-50.15
290 000911 005

Clé coudée pour vis à 6 pans intérieurs 2.5 mm
Inbusschlüssel 2.5 mm
Allen key 2.5 mm