SERIES 211 DIGITAL INDICATOR


Certificate | Data output | CR2032

- With analog reading
- Button: tolerance set, data preset, inch/mm conversion, measuring direction set, max./min./range measurement, absolute/incremental measurement
- Data output(cable code:200-03 or 200-04)
- Automatic power off
- Supplied with flat and lug back

VIDEO



211-010-13I



Range: .5"

Resolution .00005"/0.001mm

Code	Range	Accuracy	Hysteresis
211-010-03I	.5"/12.7mm	±.00015"	.00005"
211-025-03I	1"/25.4mm	±.00015"	.00005"
211-050-03I	2"/50.8mm	±.00015"	.00005"

Resolution .0005"/0.01mm

Code	Range	Accuracy	Hysteresis
211-010-13I	.5"/12.7mm	±.0015"	.0005"
211-025-13I	1"/25.4mm	±.0015"	.0005"
211-050-13I	2"/50.8mm	±.0015"	.0005"


With manufacturer inspection certificate

Styli(optional)




Application



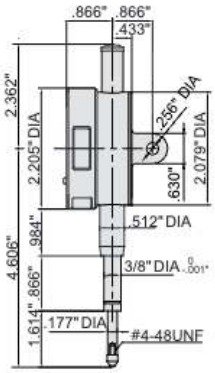

Range: 1"

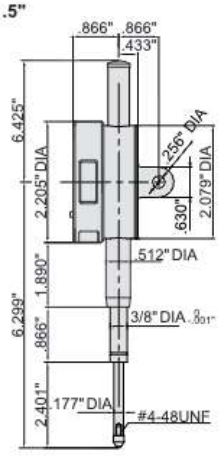

Range: 2"