SERIES 214 DIGITAL INDICATOR

Data output | CR2032

- Button: on/off, zero, inch/mm conversion, measuring direction set, data preset absolute/incremental measurement
- Automatic power off
- Data output(cable code:200-01 or 200-02)
- Supplied with lug and flat back

VIDEO

Styli(optional)




Application





214-100-11I

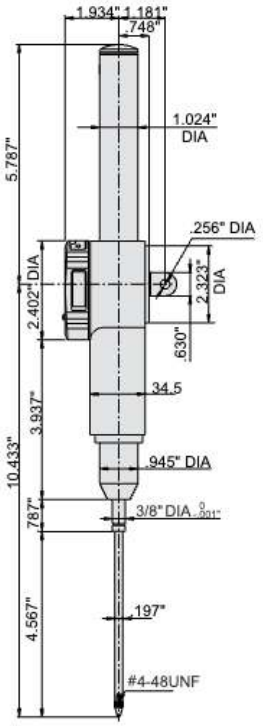

Resolution .00005"/0.001mm

Code	Range	Accuracy	Hysteresis
214-100-01I	4"/100mm	±.00030"	.0001"

Resolution .0005"/0.01mm

Code	Range	Accuracy	Hysteresis
214-100-11I	4"/100mm	±.0015"	.0005"

SERIES 214 DIGITAL INDICATOR


Certificate | Data output | CR2032

- Button: on/off, zero, inch/mm conversion, measuring direction set, data preset absolute/incremental measurement
- Automatic power off
- Data output(cable code:200-01 or 200-02)
- Supplied with flat back

VIDEO



214-005-12I

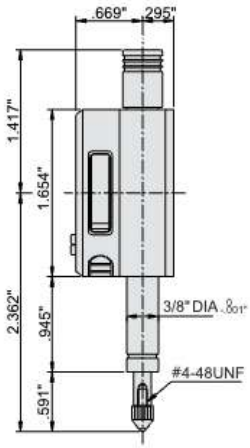

Styli(optional)



Application



Resolution .00005"/0.001mm

Code	Range	Accuracy	Hysteresis
214-005-02I	.2"/5mm	±.00015"	.000015"

Resolution .0005"/0.01mm

Code	Range	Accuracy	Hysteresis
214-005-12I	.2"/5mm	±.00015"	.00015"

With manufacturer inspection certificate