SERIES 216 DIGITAL INDICATOR

Certificate | Data output | CR2032

- Reading in digital and analog
- Display can be rotated by 320°
- Button : on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR, absolute/incremental measurement,mm/inch,data output
- Keep preset data and tolerance data in memory after restart
- Automatic power off
- Data output (cable code: 200-01 or 200-02)
- Supplied with lug and flat back




216-010-01




display can be rotated by 320°


unit: mm

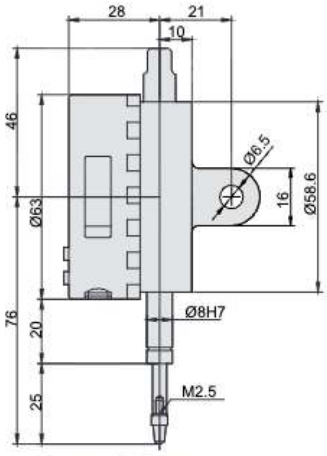

Range:0-12.7mm

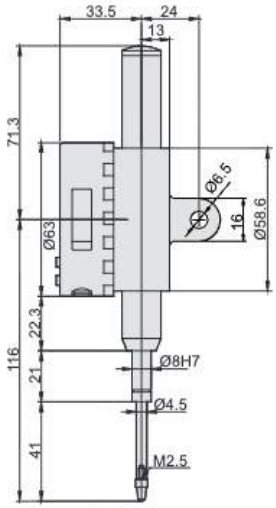

Range: 0-25.4mm

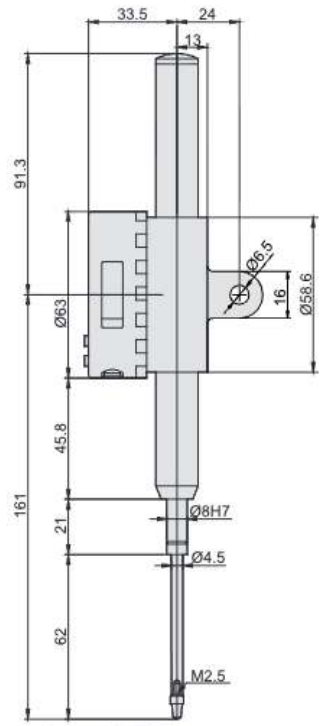

Range: 0-50.8mm

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis
216-010-01	12.7mm/0.5"	5μm	2μm
216-025-01	25.4mm/1"	5μm	3μm
216-050-01	50.8mm/2"	6μm	3μm

Resolution 0.002mm/0.00005"

Code	Range	Accuracy	Hysteresis
216-010-11	12.7mm/0.5"	20μm	10μm
216-025-11	25.4mm/1"	20μm	10μm
216-050-11	50.8mm/2"	30μm	10μm

With manufacturer inspection certificate

Contact points **(optional)**



Series **270**

Application

