
SERIES 313 DIGITAL OUTSIDE MICROMETER WITH DATA OUTPUT

Certificate | Data output | IP65



313-001-E01S

- IP65 protection level
- Button: on/off, mm/inch,set, zero
- Automatic power off
- Data output
- Carbide measuring faces, ratchet stop
- Setting standards are included(except **313-001-E01S**)

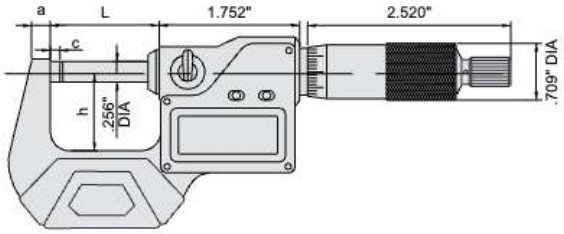


Setting standards (included)



Data output interface



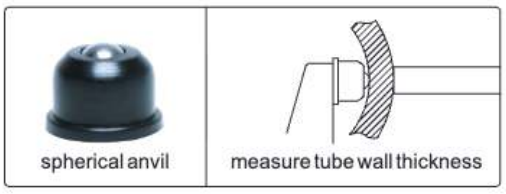

Code	Range	Accuracy	Accuracy	a	c	h	L	Setting standards(included)
313-001-E01S*	0-1"/0-25mm	.00005"/0.001mm	±.00010"	.236"	.118"	.984"	1.358"	-
313-002-E01S*	1-2"/25-50mm	.00005"/0.001mm	±.00010"	.315"	.118"	1.260"	2.343"	1"
313-003-E01S*	2-3"50-75mm	.00005"/0.001mm	±.00015"	.315"	.118"	1.752"	3.327"	2"
313-004-E01S*	3-4"/75-100mm	.00005"/0.001mm	±.00015"	.315"	.118"	2.244"	4.311"	3"
313-005-E01S	4-5"/100-125mm	.00005"/0.001mm	±.00015"	.394"	.118"	2.756"	5.315"	4"
313-006-E01S	5-6"/125-150mm	.00005"/0.001mm	±.00015"	.394"	.118"	3.228"	6.319"	5"
313-007-E01S	6-7"/150-175mm	.00005"/0.001mm	±.00020"	.472"	.217"	3.720"	7.323"	6"
313-008-E01S	7-8"/175-200mm	.00005"/0.001mm	±.00020"	.472"	.217"	4.213"	8.327"	7"
313-009-E01S	8-9"/200-225mm	.00005"/0.001mm	±.00020"	.906"	.217"	5.098"	9.291"	8"
313-010-E01S	9-10"/225-250mm	.00005"/0.001mm	±.00020"	.906"	.217"	5.610"	10.295"	9"
313-011-E01S	10-11"/250-275mm	.0001"/0.001mm	±.0002"	.906"	.217"	6.102"	11.299"	10"
313-012-E01S	11-12"/275-300mm	.0001"/0.001mm	±.0002"	.906"	.217"	6.594"	12.303"	11"

Set

Code	Range	Total QTY.	Included micrometers	Package
313-003-E03S*	0-3"/0-75mm	3pcs	0-1"/0-25mm, 1-2"/25-50mm, 2-3"/50-75mm	blow mould case
313-004-E04S*	0-4"/0-100mm	4pcs	0-1"/0-25mm, 1-2"/25-50mm, 2-3"/50-75mm, 3-4"/75-100mm	blow mould case
313-006-E06S	0-6"/0-150mm	6pcs	0-1"/0-25mm, 1-2"/25-50mm, 2-3"/50-75mm, 3-4"/75-100mm, 4-5"/100-125mm, 5-6"/125-150mm	aluminum box

* **With manufacturer inspection certificate**