SERIES 325 OUTSIDE MICROMETER WITH INTERCHANGEABLE ANVILS


- Graduation: .0001" (within 12")
  .001" (over 12")
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards



325-006-E01

Setting standards **(included)**



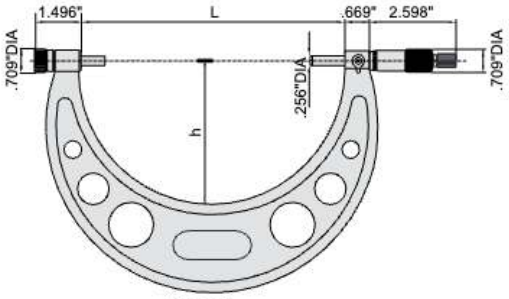


type A

Interchangeable anvils **(included)**



for different measuring ranges

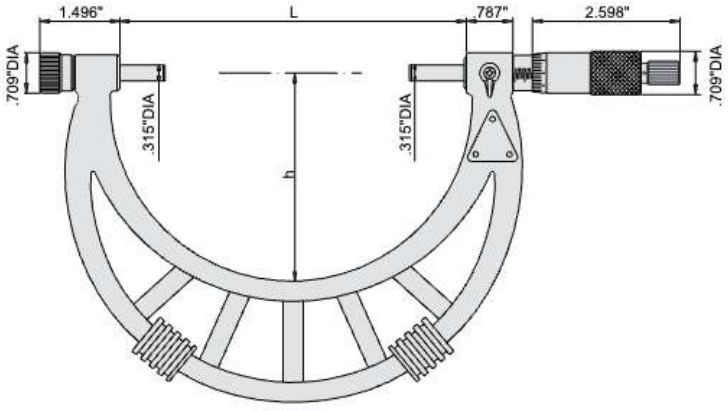

type B

Code	Range	Accuracy	Type	L	h	Setting standards (included)
325-002-E01	0-2"	.00015"	A	2.283"	1.378"	1"
325-004-E01	0-4"	.00020"	A	4.252"	2.244"	1", 2", 3"
325-006-E01	0-6"	.00025"	A	6.220"	3.228"	1", 2", 3", 4", 5"
325-008-E01	4-8"	.00030"	A	8.189"	4.488"	4", 5", 6", 7"
325-012-E01	6-12"	.00035"	A	12.126"	6.496"	6", 7", 8", 9", 10", 11"
325-016-E02	12-16"	.00045"	B	16.102"	8.819"	13", 15"
325-020-E02	16-20"	.00050"	B	20.039"	10.827"	17", 19"
325-024-E02	20-24"	.00055"	B	24.235"	13.635"	21", 23"
325-028-E02	24-28"	.00065"	B	28.148"	15.512"	25", 27"
325-032-E02	28-32"	.00070"	B	32.156"	17.837"	29", 31"
325-036-E02	32-36"	.00080"	B	36.147"	20.043"	33", 35"
325-040-E02	36-40"	.00085"	B	40.211"	21.523"	37", 39"