SERIES 389 ELECTRONIC INDICATING MICROMETER

Charge IP54


VIDEO



389-001-02WF

- Indicator: range ±0.04mm, accuracy ±1μm
- IP54 protection level
- Buttons: zero, on/off, data output, mm/inch, tolerance monitoring on/off, display interface setting, wireless transmission setting, selection of wireless transmission modes
- Automatic power off
- Power: rechargeable battery, for 20 hours continuous working(full charge)
- Supplied with setting standards (except 0-25mm)

unit: mm

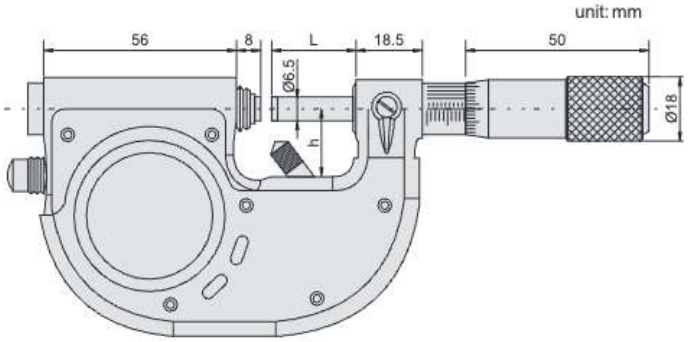

Cable (included)



Reverse side



Setting standards(included)



Indicator resolution 0.5μm

Code	Micrometer head range	Micrometer head graduation	Micrometer head accuracy	L	h	Setting standards (included)	Remark
389-001-05	0-25mm	0.002mm	3μm	28	19	-	without data transmission
389-002-05	25-50mm	0.002mm	3μm	53	35	25mm	
389-003-05	50-75mm	0.002mm	4μm	79	47	50mm	
389-004-05	75-100mm	0.002mm	4μm	104	60	75mm	

Indicator resolution 0.2μm

Code	Micrometer head range	Micrometer head graduation	Micrometer head accuracy	L	h	Setting standards (included)	Remark
389-001-02WF	0-25mm	0.002mm	3μm	28	19	-	with data transmission (by USB or blue-tooth)
389-002-02WF	25-50mm	0.002mm	3μm	53	35	25mm	
389-003-02WF	50-75mm	0.002mm	4μm	79	47	50mm	
389-004-02WF	75-100mm	0.002mm	4μm	104	60	75mm	