SERIES 530 3-WIRES




530-0195-11



530-0195-12

- Used with standard outside micrometers to measure pitch diameter of screw threads
- Diameter accuracy: ±0.5μm
- Cylindricity: 1μm
- Hardness: HRC60
- Scope of application: outside diameter of thread ≤50mm

unit: mm

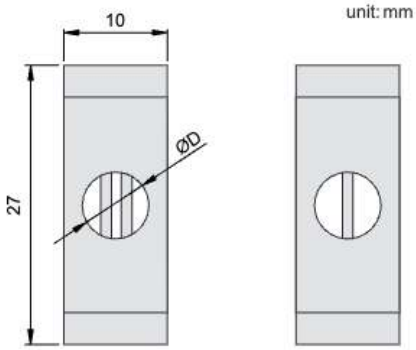

Application



For outside micrometers with spindle Ø6.35mm (ØD)

Code	Pin gage diameter	Applicable pitch
530-0170-11	Ø0.170mm	0.2mm, 0.25mm, 0.3mm
530-0195-11	Ø0.195mm	0.35mm
530-0220-11	Ø0.220mm	0.4mm
530-0250-11	Ø0.250mm	0.45mm
530-0290-11	Ø0.290mm	0.5mm
530-0335-11	Ø0.335mm	0.6mm
530-0390-11	Ø0.390mm	0.7mm
530-0455-11	Ø0.455mm	0.75mm,0.8mm
530-0530-11	Ø0.530mm	0.9mm
530-0620-11	Ø0.620mm	1.0mm
530-0725-11	Ø0.725mm	1.25mm
530-0895-11	Ø0.895mm	1.5mm
530-1100-11	Ø1.100mm	1.75mm,2.0mm
530-1350-11	Ø1.350mm	2.5mm
530-1650-11	Ø1.650mm	3.0mm
530-2050-11	Ø2.050mm	3.5mm
530-2550-11	Ø2.550mm	4mm, 4.5mm
530-3200-11	Ø3.200mm	5mm, 5.5mm, 6mm
530-018-11	18 pairs/set, including all above 3-wires	

For outside micrometers with spindle Ø6.50mm (ØD)

Code	Pin gage diameter	Applicable pitch
530-0170-12	Ø0.170mm	0.2mm, 0.25mm, 0.3mm
530-0195-12	Ø0.195mm	0.35mm
530-0220-12	Ø0.220mm	0.4mm
530-0250-12	Ø0.250mm	0.45mm
530-0290-12	Ø0.290mm	0.5mm
530-0335-12	Ø0.335mm	0.6mm
530-0390-12	Ø0.390mm	0.7mm
530-0455-12	Ø0.455mm	0.75mm,0.8mm
530-0530-12	Ø0.530mm	0.9mm
530-0620-12	Ø0.620mm	1.0mm
530-0725-12	Ø0.725mm	1.25mm
530-0895-12	Ø0.895mm	1.5mm
530-1100-12	Ø1.100mm	1.75mm,2.0mm
530-1350-12	Ø1.350mm	2.5mm
530-1650-12	Ø1.650mm	3.0mm
530-2050-12	Ø2.050mm	3.5mm
530-2550-12	Ø2.550mm	4mm, 4.5mm
530-3200-12	Ø3.200mm	5mm, 5.5mm, 6mm
530-018-12	18 pairs/set, including all above 3-wires	