
RM50S AUTOMOTIVE REFRACTOMETER



prism

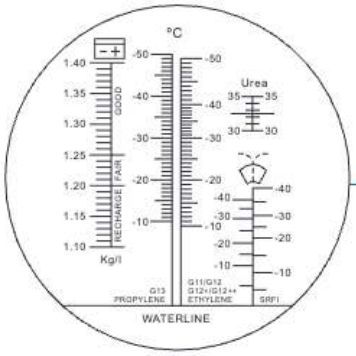

SPECIFICATION

Range (ethylene)	Glycol	0-50°C
	Propylene Glycol	0-50°C
	Battery fluid	1.10-1.40kg/L
	Cleaning liquid	0-40°C
	Adblue(Urea)	30-35%
Accuracy (ethylene)	Glycol	5°C
	Propylene Glycol	5°C
	Battery fluid	0.01kg/L
	Cleaning liquid	10°C
	Adblue(Urea)	0.2%

INCLUDED ACCESSORIES

Main unit	1pc
Pipette	1pc
Screwdriver	1pc