DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS

DATA OUTPUT

VIDEO



1124-300A

short spherical/flat points (included)



long spherical/flat points (included)



short spherical blade points (included)

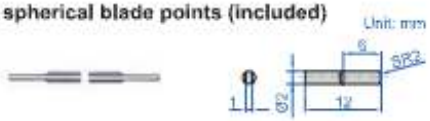

long spherical blade points (included)

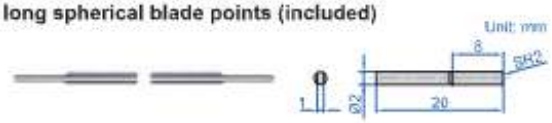

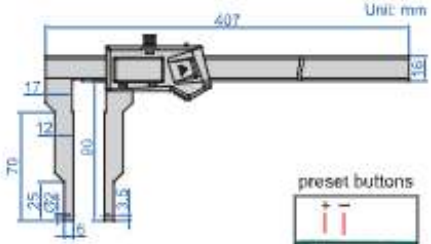

preset buttons



zero setting block for external measurement (included)



- Non waterproof
- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points (code **1526-T101**, **7392**, **7391**, **7381**, **7321**), depth stop (code **6143**)

install points



measure internal and external grooves

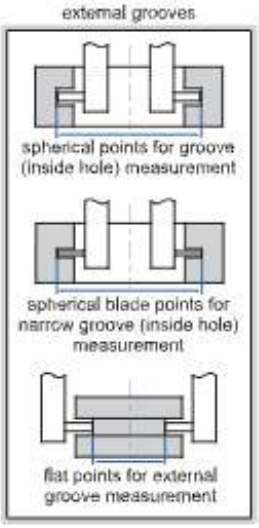

With data interface

Code	Wireless transmitter (optional)
1124-300A	**7315-25** (receiver is needed)

Built-in wireless

Code	Receiver (optional)
1124-300AWL	code **7315-2/3/6/7/8/9**

Point	Range	Accuracy	Application
short spherical/flat points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/flat points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	for narrow grooves inside hole (small hole)
long spherical blade points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	for narrow grooves inside hole (large hole)

Depth stop (optional)

Code
6143



6143



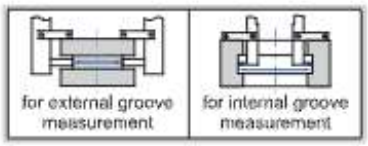



Point sleeve (optional)

Code
1526-T101



1526-T101



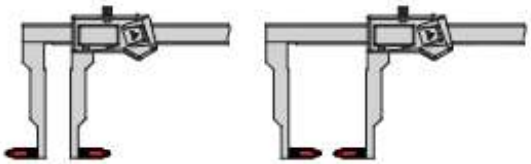

working with multifunctional points, ball points and screw thread points

Ball points (optional)

Code	Ball dia. (D)
7391-T2*	SØ1.5mm
7391-T3*	SØ2.0mm
7391-T4*	SØ2.5mm
7391-T5*	SØ3.0mm
7391-T6*	SØ3.5mm
7391-T7*	SØ4.0mm
7391-T8*	SØ4.5mm
7391-T9*	SØ5.0mm
7391-T10*	SØ6.0mm

*It is necessary to use point sleeve (code **1526-T101**) for these points

Measuring range**

internal	external
78-369mm/3.1-14.5"	0-234mm/0-9.2"

Range of **1124-300A and **1124-300AWL** after installing the ball points



7391-T5



Measuring range**

internal	external
67-367mm/2.6-14.4"	0-255mm/0-10"

Range of **1124-300A and **1124-300AWL** after installing the multifunctional points

Multifunctional points (optional)

Code	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point

*It is necessary to use point sleeve (code **1526-T101**) for these points



Measuring range**

internal	external
67-367mm/2.6-14.4"	0-255mm/0-10"

Range of **1124-300A and **1124-300AWL** after installing the screw thread points

Screw thread points (optional)

Internal thread (60° thread angle)

Code	Pitch
7321-T11*	0.4-0.5mm/64-48TPI
7321-T12*	0.6-0.9mm/44-28TPI
7321-T13*	1-1.75mm/24-14TPI
7321-T14*	2-3mm/13-9TPI
7321-T15*	3.5-5mm/8-5TPI
7321-T16*	5.5-7mm/4.5-3.5TPI
7321-T1S*	6 pairs/set, including all above points

External thread (60° thread angle)

Code	Pitch
7381-T11*	0.4-0.5mm/64-48TPI
7381-T12*	0.6-0.9mm/44-28TPI
7381-T13*	1-1.75mm/24-14TPI
7381-T14*	2-3mm/13-9TPI
7381-T15*	3.5-5mm/8-5TPI
7381-T16*	5.5-7mm/4.5-3.5TPI
7381-TS*	6 pairs/set, including all above points



7321-T16



7381-T11

*It is necessary to use point sleeve (code **1526-T101**) for these points