BACK PLUNGER TYPE DIGITAL INDICATORS

INSPECTION CERTIFICATE


DATA OUTPUT








2118-10




- Display can rotate 320°, and display direction is changeable
- Reading in digital and analog
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory:
  wireless transmitter code **7315-50M** (receiver is needed) page 8, data output cable code **7302-40M** page 16, **7305-40M** page 19, backs (page 315~316), contact points (page 310~314)







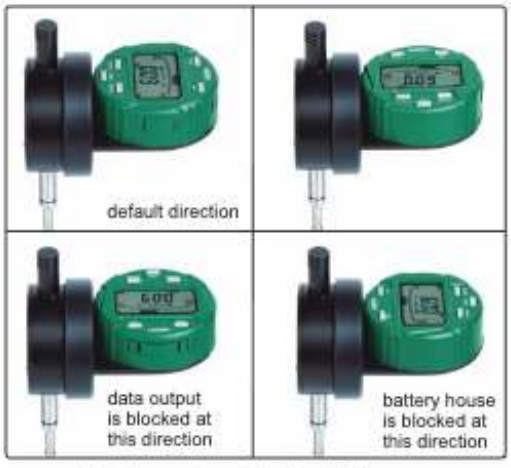

remark: to change above direction, 4 fixing screws on the back of display need to be removed first.

Code	Range	Resolution	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2118-10 *	12.7mm/0.5"	0.01mm/0.0005"	20μm	10μm	1.5N	can lift	flat back
2118-101 *	12.7mm/0.5"	0.001mm/0.00005"	5μm	2μm	1.5N	can lift	flat back

*Supplied with manufacturer inspection certificate

10

ZEROING FOOT SWITCH

VIDEO

- For zeroing of digital indicators



7360-1M

Code	Description	Interface of digital Indicators	Applicable products
7360-1M	zeroing foot switch with cable (length 2.5m)		 for digital indicators

