DIGITAL INDICATORS (WITH TRANSMISSION BUTTON AND SIGNAL LIGHT)

DATA OUTPUT

INSPECTION CERTIFICATE

VIDEO



2138-10



2139-25



2139-25P




2138-50

spindle lift knob is included






2138-10
2139-10

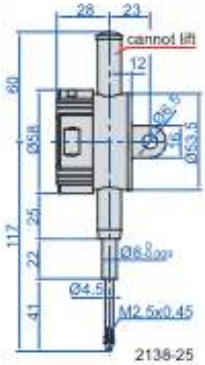


2138-25
2139-25

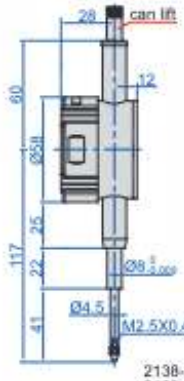

2138-25P
2139-25P


Unit: mm

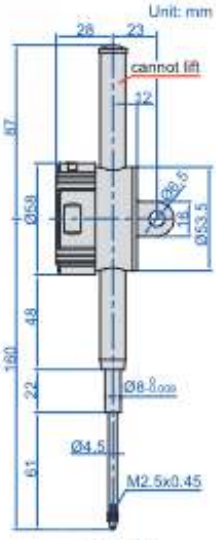

2138-50
2139-50

- Reading in digital and analog
- Display can be rotated by 320°
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement, data output
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory:
  flat back: wireless transmitter code **7315-51** (receiver is needed) page 8, data output cable code **7302-40M** page 16, **7305-40M** page 19;
  lug back: wireless transmitter code **7315-50M** (receiver is needed) page 8, data output cable code **7302-40M** page 16, **7305-40M** page 19,
  backs (page 315~316), contact points (page 310~314)

max./min./TIR



max./min./TIR measurement

analog pointer



alarm when over tolerance



Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2138-10F*	12.7mm/0.5"	5μm	2μm	1.5N	can lift	flat back
2138-25F*	25.4mm/1"	5μm	3μm	2.2N	cannot lift	flat back
2138-50F*	50.8mm/2"	6μm	3μm	2.5N	cannot lift	flat back
2138-10*	12.7mm/0.5"	5μm	2μm	1.5N	can lift	lug back
2138-25*	25.4mm/1"	5μm	3μm	2.2N	cannot lift	lug back
2138-50*	50.8mm/2"	6μm	3μm	2.5N	cannot lift	lug back
2138-25P*	25.4mm/1"	5μm	3μm	2.2N	can lift	flat back
2138-50P*	50.8mm/2"	6μm	3μm	2.5N	can lift	flat back

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2139-10F*	12.7mm/0.5"	20μm	10μm	1.5N	can lift	flat back
2139-25F*	25.4mm/1"	20μm	10μm	2.2N	cannot lift	flat back
2139-50F*	50.8mm/2"	30μm	10μm	2.5N	cannot lift	flat back
2139-10*	12.7mm/0.5"	20μm	10μm	1.5N	can lift	lug back
2139-25*	25.4mm/1"	20μm	10μm	2.2N	cannot lift	lug back
2139-50*	50.8mm/2"	30μm	10μm	2.5N	cannot lift	lug back
2139-25P*	25.4mm/1"	20μm	10μm	2.2N	can lift	flat back
2139-50P*	50.8mm/2"	30μm	10μm	2.5N	can lift	flat back

*Supplied with manufacturer inspection certificate



