SHOCKPROOF DIAL INDICATORS


INSPECTION CERTIFICATE | SHOCK PROOF | JEWELED BEARING

- Meet DIN878
- Shockproof
- Jeweled bearing
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs (page 315~316), contact points (page 310~314)



2314-10A

Unit: mm



Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Maximum measuring force	Cap	Remark
2314-3FA*	3mm	0.01mm	12μm	3μm	1mm	0-100	1.5N	can lift	flat back
2314-5FA*	5mm	0.01mm	14μm	3μm	1mm	0-100	1.5N	can lift	flat back
2314-10FA*	10mm	0.01mm	17μm	3μm	1mm	0-100	1.5N	can lift	flat back
2314-3A*	3mm	0.01mm	12μm	3μm	1mm	0-100	1.5N	can lift	lug back
2314-5A*	5mm	0.01mm	14μm	3μm	1mm	0-100	1.5N	can lift	lug back
2314-10A*	10mm	0.01mm	17μm	3μm	1mm	0-100	1.5N	can lift	lug back

*Supplied with manufacturer inspection certificate

BACK PLUNGER DIAL INDICATOR

INSIZE PLUS


INSPECTION CERTIFICATE

- With limit pointers
- Optional accessory: contact points (page 310~314)



2893-3

Unit: mm



Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Maximum measuring force
2893-3*	3mm	0.01mm	15μm	5μm	1mm	0-100	1.5N

*Supplied with manufacturer inspection certificate

10

WATERPROOF DIAL INDICATOR

INSIZE PLUS


INSPECTION CERTIFICATE | SHOCK PROOF | IP67 WATERPROOF

- Meet DIN878
- Shockproof
- IP67 dust/waterproof
- With limit pointers
- Optional accessory: contact points (page 310~314)



2894-10F

Unit: mm

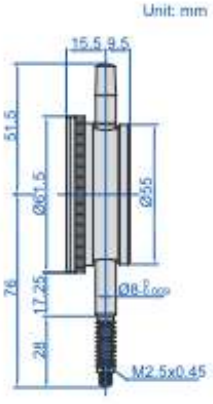

Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Maximum measuring force	Cap	Remark
2894-10F*	10mm	0.01mm	17μm	3μm	1mm	0-100	1.5N	cannot lift	flat back

*Supplied with manufacturer inspection certificate