DIGITAL INTERNAL MEASURING GAUGES


VIDEO

DATA OUTPUT

- Measure internal dimensions
- Resolution: 0.001mm/0.00005"
- Accuracy: 5μm
- Repeatability: 1μm
- Movable point stroke: 5mm/0.2"
- Point height is adjustable, h=2-25mm
- CR2032 battery, automatic power off (time is adjustable)
- Data output



2932-451

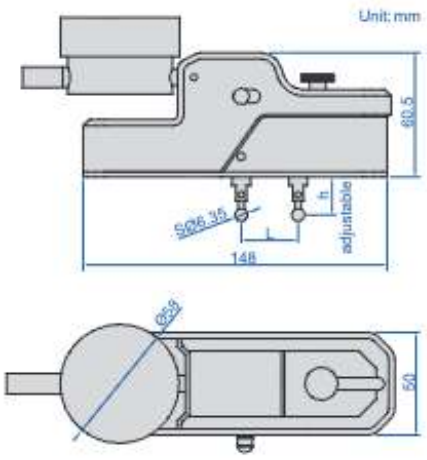

5


Code	Measuring range (L)*	Indicator	Wireless transmitter (optional)
2932-45	24-50mm/0.95-2"	Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement	**7315-50M** (receiver is needed) page 8
2932-451	24-50mm/0.95-2"	With transmission button and signal light Reading in digital and analog Display can be rotated by 320° Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement, max./min./TIR measurement, tolerance Go and No-Go display	**7315-51** (receiver is needed) page 8

*The measuring range will change according to different measuring points

Disk points (optional, supplied in pair)









Code	Measuring range	Material
2932-S101	30-55mm/1.2-2.2"	stainless steel

Conical points (optional, supplied in pair)









Code	Measuring range	Material
2932-S102	20-45mm/0.8-1.8"	stainless steel


Spherical points (optional, supplied in pair)






Code	Measuring range	Material
2932-S103	30-60mm/1.2-2.4"	stainless steel

Spherical blade points (optional, supplied in pair)





Code	Measuring range	Material
2932-S104	30-60mm/1.2-2.4"	stainless steel

To be continued