DIGITAL EXTERNAL MEASURING GAUGES

VIDEO

DATA OUTPUT

- Measure external dimensions
- Resolution: 0.001mm/0.00005"
- Accuracy: 5μm
- Repeatability: 1μm
- Movable point stroke: 5mm/0.2"
- Point height is adjustable, h=2-25mm
- CR2032 battery, automatic power off (time is adjustable)
- Data output



2934-401

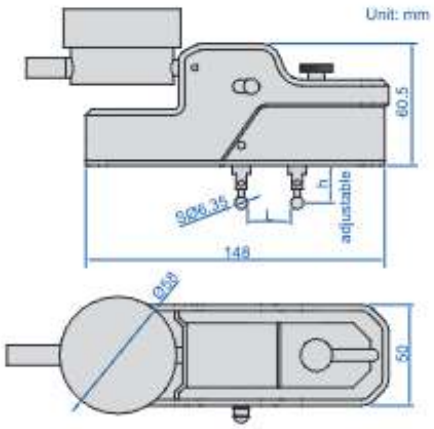

5

Code	Measuring range (L)*	Indicator	Wireless transmitter (optional)
2934-40	13-38mm/0.51-1.5"	Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement	**7315-50M** (receiver is needed) page 8
2934-401	13-38mm/0.51-1.5"	With transmission button and signal light Reading in digital and analog Display can be rotated by 320° Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement, max./min./TIR measurement, tolerance Go and No-Go display	**7315-51** (receiver is needed) page 8

*The measuring range will change according to different measuring points

Disk points (optional, supplied in pair)







Code	Measuring range	Material
2934-S101	10-35mm/0.4-1.4"	stainless steel

Flat shoulder points (optional, supplied in pair)







Code	Measuring range	Material
2934-S102	30-55mm/1.2-2.2"	stainless steel

Conical points (optional, supplied in pair)







Code	Measuring range	Material
2932-S102	20-45mm/0.8-1.8"	stainless steel

Ball points (optional, supplied in pair)



1527-T104





Code	Diameter (D)	Accuracy of diameter	Material
1527-T102	1/8" (Ø3.175mm)	±0.005mm	stainless steel
1527-T103	3/16" (Ø4.7625mm)	±0.005mm	stainless steel
1527-T104	1/4" (Ø6.35mm)	±0.005mm	stainless steel
1527-T105	3/8" (Ø9.525mm)	±0.005mm	stainless steel
1527-T106	1/2" (Ø12.7mm)	±0.005mm	stainless steel