
DIGITAL SPHERICAL ANVIL TUBE MICROMETERS/SNAP GAUGES

IP65 WATERPROOF | NON-ROTATING SPINDLE | ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF | ONE TURN OF SLEEVE MAKES 5MM SPINDLE FEED, PRESS THE FORK, THE SPINDLE RETRACTS 3MM | MEASUREMENT ACCURACY IS NOT AFFECTED BY THE USE OF SLEEVE

INSPECTION CERTIFICATE | ATTENTION: RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING | DATA OUTPUT


VIDEO






3355-25

- Measure wall thickness of tubes
- Absolute encoder, the original data remains after power off
- Adjustable resolution: 0.0002mm/0.00001"
  0.001mm/0.00005"
  0.01mm/0.0005"
- One turn of sleeve makes 5mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N
  Customizable measuring force range 2-12N
  Attention: small measuring force will reduce the dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Supplied with gauge blocks for zero setting (except 0-25mm/0-1")
- Power: rechargeable battery, for 24 hours continuous working

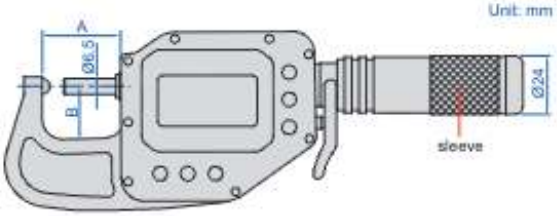



With data interface (optional wireless transmitter code 7315-3350, receiver is needed page 9)

Code	Range	Accuracy	Repeatability	A	B
3355-25 *	0-25mm/0-1"	2μm	1μm	38mm	24mm
3355-50 *	25-50mm/1-2"	2μm	1μm	63mm	25mm
3355-75 *	50-75mm/2-3"	2μm	1μm	88mm	42mm
3355-100 *	75-100mm/3-3.95"	2μm	1μm	113mm	56mm

alarm when over tolerance



Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code	Range	Accuracy	Repeatability	A	B
3355-25AWL*	0-25mm/0-1"	2μm	1μm	38mm	24mm
3355-50AWL*	25-50mm/1-2"	2μm	1μm	63mm	25mm
3355-75AWL*	50-75mm/2-3"	2μm	1μm	88mm	42mm
3355-100AWL*	75-100mm/3-3.95"	2μm	1μm	113mm	56mm

*Supplied with manufacturer inspection certificate