DIGITAL SPLINE MICROMETERS/SNAP GAUGES

ONE TURN OF SLEEVE MAKES 5MM SPINDLE FEED, PRESS THE FORK, THE SPINDLE RETRACTS 3MM

MEASUREMENT ACCURACY IS NOT AFFECTED BY THE USE OF SLEEVE

NON-ROTATING SPINDLE

ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF

IP65 WATERPROOF

ATTENTION: RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING

DATA OUTPUT

INSPECTION CERTIFICATE

VIDEO





3356-25

- Measure splined shafts, slots and keyways
- Absolute encoder, the original data remains after power off
- Adjustable resolution: 0.0002mm/0.00001"
  0.001mm/0.00005"
  0.01mm/0.0005"
- One turn of sleeve makes 5mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N
  Customizable measuring force range 2-12N
  Attention: small measuring force will reduce the dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Supplied with gauge blocks for zero setting (except 0-25mm/0-1")
- Power: rechargeable battery, for 24 hours continuous working

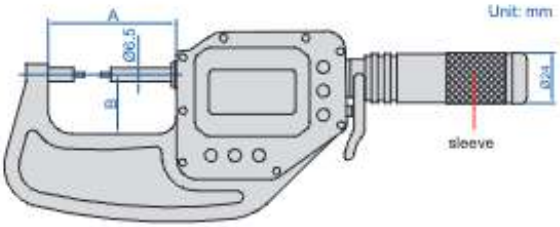





With data interface (optional wireless transmitter code 7315-3350, receiver is needed page 9)

Code	Range	Accuracy	Type	Repeatability	A	B
3356-25*	0-25mm/0-1"	2μm	A	1μm	63mm	25mm
3356-50*	25-50mm/1-2"	2μm	A	1μm	88mm	42mm
3356-75*	50-75mm/2-3"	2μm	A	1μm	113mm	56mm
3356-25B*	0-25mm/0-1"	2μm	B	1μm	63mm	25mm
3356-50B*	25-50mm/1-2"	2μm	B	1μm	88mm	42mm
3356-75B*	50-75mm/2-3"	2μm	B	1μm	113mm	56mm

alarm when over tolerance



Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code	Range	Accuracy	Type	Repeatability	A	B
3356-25WL*	0-25mm/0-1"	2μm	A	1μm	63mm	25mm
3356-50WL*	25-50mm/1-2"	2μm	A	1μm	88mm	42mm
3356-75WL*	50-75mm/2-3"	2μm	A	1μm	113mm	56mm
3356-25BWL*	0-25mm/0-1"	2μm	B	1μm	63mm	25mm
3356-50BWL*	25-50mm/1-2"	2μm	B	1μm	88mm	42mm
3356-75BWL*	50-75mm/2-3"	2μm	B	1μm	113mm	56mm

*Supplied with manufacturer inspection certificate