BLADE MICROMETERS

INSIZE PLUS


INSPECTION CERTIFICATE


ATTENTION: SETTING STANDARDS ARE NOT INCLUDED





3650-25A

- Meet DIN863-3
- Graduation 0.01mm
- Force: 5-10N
- Optional accessory: setting standards (code **7386**)

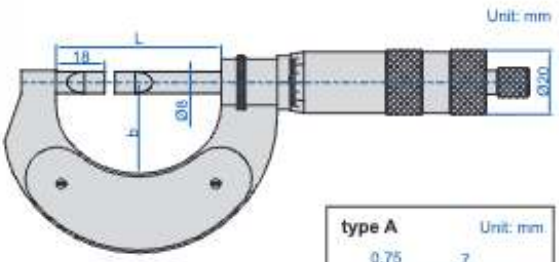







(mm)

Code	Range	Type	Accuracy	L	b
3650-25A*	0-25mm	A	4μm	62	34
3650-50A*	25-50mm	A	4μm	87	46
3650-75A*	50-75mm	B	5μm	112	60
3650-100A*	75-100mm	B	5μm	139	72
3650-125A*	100-125mm	B	6μm	164	85
3650-150A*	125-150mm	B	6μm	190	97
3650-175A*	150-175mm	B	7μm	215	110
3650-200A*	175-200mm	B	7μm	240	122
3650-225A*	200-225mm	B	8μm	264	135
3650-250A*	225-250mm	B	8μm	290	148
3650-275A*	250-275mm	B	9μm	315	160
3650-300A*	275-300mm	B	9μm	340	174

*Supplied with manufacturer inspection certificate

6


BLADE MICROMETERS


NON-ROTATING SPINDLE





3232-25A

- Meet DIN863-3
- Measure the groove diameter of shafts and keyways
- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Supplied with setting standards (except 0-25mm)

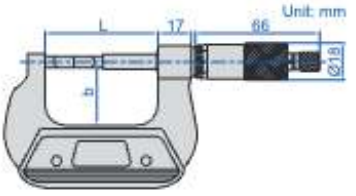







Type A (mm)

Code	Range	Accuracy	L	b
3232-25A	0-25mm	4μm	57	32
3232-50A	25-50mm	4μm	82	44.5
3232-75A	50-75mm	5μm	107	57
3232-100A	75-100mm	5μm	132.6	69.5
3232-125A	100-125mm	6μm	158	82
3232-150A	125-150mm	6μm	183.4	94.5
3232-175A	150-175mm	7μm	208.8	107
3232-200A	175-200mm	7μm	234.2	129.6
3232-225A	200-225mm	8μm	259.6	142.3
3232-250A	225-250mm	8μm	285	155
3232-275A	250-275mm	9μm	310.4	167.7
3232-300A	275-300mm	9μm	336.5	177.8

Type B (mm)

Code	Range	Accuracy	L	b
3232-25BA	0-25mm	4μm	57	32
3232-50BA	25-50mm	4μm	82	44.5
3232-75BA	50-75mm	5μm	107	57
3232-100BA	75-100mm	5μm	132.6	69.5
3232-125BA	100-125mm	6μm	158	82
3232-150BA	125-150mm	6μm	183.4	94.5
3232-175BA	150-175mm	7μm	208.8	107
3232-200BA	175-200mm	7μm	234.2	129.6
3232-225BA	200-225mm	8μm	259.6	142.3
3232-250BA	225-250mm	8μm	285	155
3232-275BA	250-275mm	9μm	310.4	167.7
3232-300BA	275-300mm	9μm	336.5	177.8