BLOCK LEVELS

POPULAR MODEL


VIDEO

- V-groove on bottom for shafts (shafts dia. 15~68mm)
- With transverse vial



4903-200A

Unit: mm

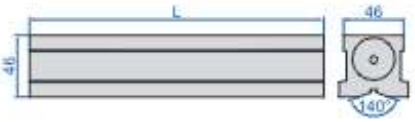

Code		Length (L)
Sensitivity 0.02mm/m (=0.001°)	Sensitivity 0.05mm/m (=0.0029°)	
4903-150A	4903-C150	150mm
4903-200A	4903-C200	200mm
4903-300A	4903-C300	300mm

SHORT LEVEL

INSIZE PLUS


NO NEED TO SET ZERO BEFORE USE

- No need to set zero before use
- Suitable for small spaces like crankshaft
- Longitudinal and transverse V-grooves on bottom for shafts (shafts dia. 19.3~115.9mm)
- With transverse vial



4907-90

Unit: mm

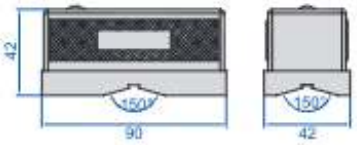

Code	Length	Sensitivity
4907-90	90mm	0.1mm/m (=0.0057°)

MINI LEVEL

INSIZE PLUS


NO NEED TO SET ZERO BEFORE USE

- No need to set zero before use
- With mounting holes (for M5 screws)



4908-100

Unit: mm



Code	Length	Sensitivity
4908-100	100mm	0.1mm/m (=0.0057°)