
DIAL TEST INDICATOR UNIVERSAL HOLDERS



6297-1



6297-2

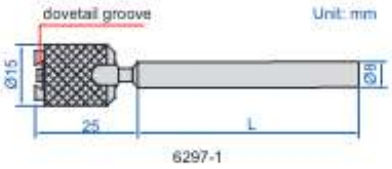

6297-1



6297-2/6297-3

- Set the indicators at the desired attitude to the workpiece

Code	Stem section	Stem lenth (L)
6297-1	Ø8mm	55mm
6297-2	9×9mm	50mm
6297-3	9×9mm	100mm




DIAL TEST INDICATOR HOLDER



6296-1

- Supplied with hex key

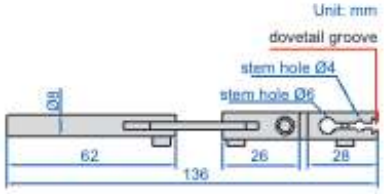

Code
6296-1



DIAL TEST INDICATOR HOLDERS



6293-1



6293-2



6293-1/6293-6/6293-8



6293-2

Code	Stem section	Stem length (L)
6293-1	9x9mm	100mm
6293-6	9x9mm	50mm
6293-8 *	9x9mm	200mm
6293-2	Ø8mm	115mm

*Only apply for 0.01mm dial test indicator




POPULAR MODEL

VIDEO

CENTERING INDICATOR



2385-3

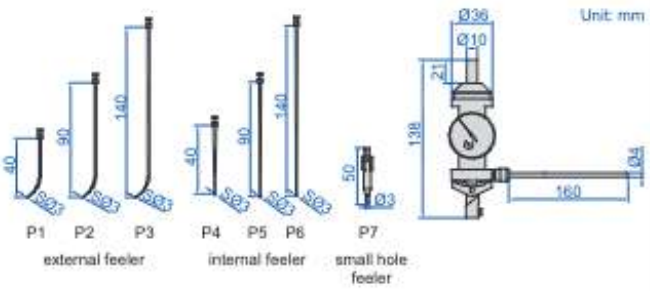




- Provides quick and accurate centering in boring and milling set-up
- Maximum speed is recommended not to exceed 800rpm

Code
2385-3

Feeler	Measuring diameter	Accuracy
P1	Ø0-60mm	0.015mm
P2	Ø0-160mm	0.02mm
P3	Ø0-250mm	0.03mm
P4	Ø3.2-80mm	0.015mm
P5	Ø3.2-180mm	0.02mm
P6	Ø3.2-280mm	0.03mm
P7	Ø0-2.8mm	0.015mm

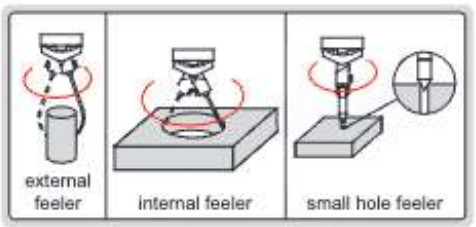

REFER TO PAGE 318~319 FOR DETAILS

DIAL INDICATOR HOLDERS



6296-1



6291-1



6297-1



6294-1A



6295-1A