ELECTRONIC EDGE FINDERS



6566-2 6566-3

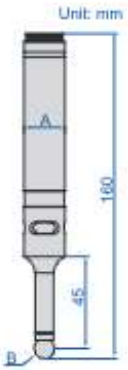



- The shank is electrically conducted to the metal workpiece through the chuck and table. The LED lights up and the beeper sounds (only for **6566-3**), when the ball touches the workpiece
- Not suitable for rotary use
- Hardened shank and contact ball

Code	Shank (A)	Contact ball (B)	Accuracy	Beeper	Battery
6566-2	Ø20mm	SØ10mm	5μm	without	23A, 12V×1 pc
6566-3	Ø20mm	SØ10mm	5μm	with	23A, 12V×1 pc

NON-MAGNETIC EDGE FINDERS



6573-1 6573-2



6573-1 6573-2

- TiAlN coating, non-magnetic, hardness HV2500, extremely wear resistance
- Suitable for machine speed 400~600rpm

Code	Shank (A)	Contact point (B)	Contact point (C)	Accuracy
6573-1	Ø10mm	Ø10mm	—	5μm
6573-2	Ø10mm	Ø10mm	Ø4mm	5μm



6573-1



6573-2