
Continued from previous page


Depth stop (optional)

Code
6143




6143






2

Point sleeve (optional)



1526-T101



Code
1526-T101

Ball points (optional)


7391-T5




*It is necessary to use point sleeve (code **1526-T101**) for these points

Range of **1526-200 and **1526-200WL** after installing the points and point sleeve

Code	Ball dia. (D)	Range**
7391-T3*	SØ2.0mm	75-275mm/3.0-10.8" (internal) 0-146mm/0-5.7" (external)
7391-T4*	SØ2.5mm	76-276mm/3.0-10.8" (internal) 0-145mm/0-5.7" (external)
7391-T5*	SØ3.0mm	77-277mm/3.0-10.9" (internal) 0-144mm/0-5.6" (external)
7391-T6*	SØ3.5mm	78-278mm/3.1-10.9" (internal) 0-143mm/0-5.6" (external)
7391-T7*	SØ4.0mm	79-279mm/3.1-10.9" (internal) 0-142mm/0-5.6" (external)
7391-T8*	SØ4.5mm	80-280mm/3.2-11.0" (internal) 0-141mm/0-5.5" (external)
7391-T9*	SØ5.0mm	81-281mm/3.2-11.0" (internal) 0-140mm/0-5.5" (external)
7391-T10*	SØ6.0mm	83-283mm/3.3-11.1" (internal) 0-138mm/0-5.4" (external)

Multifunctional points (optional)

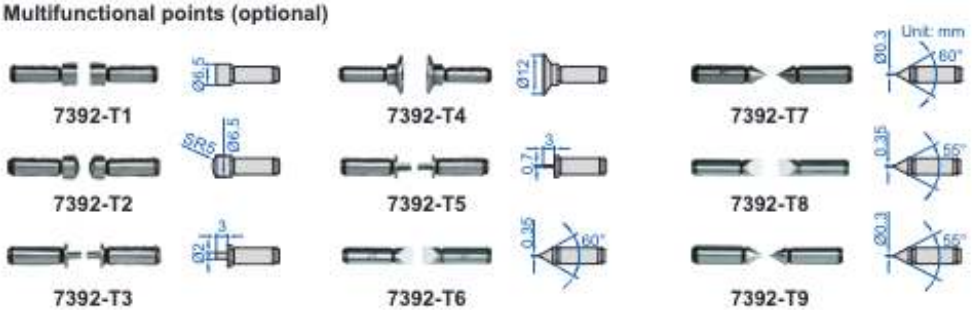

Range**
66-266mm/2.6-10.5" (internal), 0-155mm/0-6.1" (external)

Range of **1526-200 and **1526-200WL** after installing the points and point sleeve

Code	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point

*It is necessary to use point sleeve (code **1526-T101**) for these points

Screw thread points (optional)



7321-T16



7381-T11

Internal thread (60° thread angle)

Code	Pitch
7321-T11*	0.4-0.5mm/64-48TPI
7321-T12*	0.6-0.9mm/44-28TPI
7321-T13*	1-1.75mm/24-14TPI
7321-T14*	2-3mm/13-9TPI
7321-T15*	3.5-5mm/8-5TPI
7321-T16*	5.5-7mm/4.5-3.5TPI
7321-T1S*	6 pairs/set, including all above points

External thread (60° thread angle)

Code	Pitch
7381-T11*	0.4-0.5mm/64-48TPI
7381-T12*	0.6-0.9mm/44-28TPI
7381-T13*	1-1.75mm/24-14TPI
7381-T14*	2-3mm/13-9TPI
7381-T15*	3.5-5mm/8-5TPI
7381-T16*	5.5-7mm/4.5-3.5TPI
7381-TS*	6 pairs/set, including all above points

*It is necessary to use point sleeve (code **1526-T101**) for these points

Range**
66-266mm/2.6-10.5" (internal) 0-155mm/0-6.1" (external)


Range of **1526-200 and **1526-200WL** after installing the points and point sleeve


Continued from previous page

Ball points (optional, supplied in pair)



1527-T104






ball points for internal diameter measurement


Code	Diameter (D)	Accuracy of diameter	Material
1527-T102	1/8" (Ø3.175mm)	±0.005mm	stainless steel
1527-T103	3/16" (Ø4.7625mm)	±0.005mm	stainless steel
1527-T104	1/4" (Ø6.35mm)	±0.005mm	stainless steel
1527-T105	3/8" (Ø9.525mm)	±0.005mm	stainless steel
1527-T106	1/2" (Ø12.7mm)	±0.005mm	stainless steel

Point sleeve (optional, supplied in pair)





Code
1526-T101

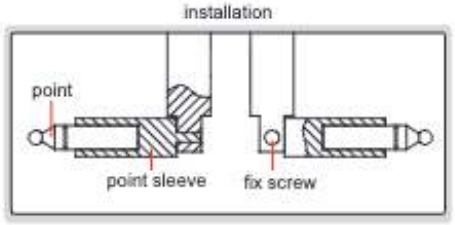

Multifunctional points (optional, supplied in pair)



7392-T1



7392-T2



7392-T3



7392-T4



7392-T5



7392-T6



7392-T7



7392-T8



7392-T9

Measuring range **
80-105mm/3.2-4.2"

** After installing points and point sleeve


Code	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point

* It is necessary to use point sleeve (code **1526-T101**) for these points

Screw thread points (optional, supplied in pair)



7321-T16



Measuring range **
80-105mm/3.2-4.2"

** After installing points and point sleeve

Internal thread (60° thread angle)

Code	Pitch
7321-T11*	0.4-0.5mm/64-48TPI
7321-T12*	0.6-0.9mm/44-28TPI
7321-T13*	1-1.75mm/24-14TPI
7321-T14*	2-3mm/13-9TPI
7321-T15*	3.5-5mm/8-5TPI
7321-T16*	5.5-7mm/4.5-3.5TPI
7321-T1S*	6 pairs/set, including all above points

* It is necessary to use point sleeve (code **1526-T101**) for these points

Ball points (optional, supplied in pair)



7391-T5



Measuring range **
80-105mm/3.2-4.2"


** After installing points and point sleeve

Code	Ball dia. (D)
7391-T2*	SØ1.5mm
7391-T3*	SØ2.0mm
7391-T4*	SØ2.5mm
7391-T5*	SØ3.0mm
7391-T6*	SØ3.5mm
7391-T7*	SØ4.0mm
7391-T8*	SØ4.5mm
7391-T9*	SØ5.0mm
7391-T10*	SØ6.0mm

* It is necessary to use point sleeve (code **1526-T101**) for these points

Continued from previous page

Multifunctional points (optional, supplied in pair)

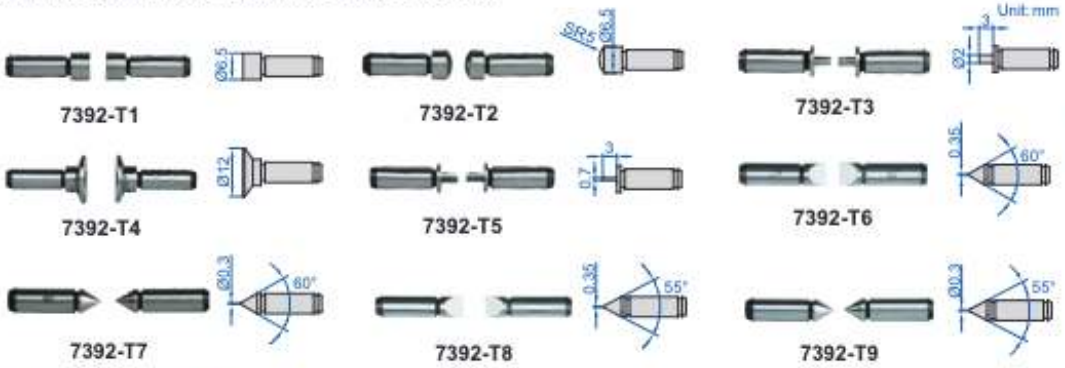

Measuring range **
100-370mm/3.94-14.5"


** After installing points and point sleeve

Code	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point

* It is necessary to use point sleeve (code **1526-T101**) for these points

5

Screw thread points (optional, supplied in pair)



Measuring range **
100-370mm/3.94-14.5"


** After installing points and point sleeve

Internal thread (60° thread angle)

Code	Pitch
7321-T11*	0.4-0.5mm/64-48TPI
7321-T12*	0.6-0.9mm/44-28TPI
7321-T13*	1-1.75mm/24-14TPI
7321-T14*	2-3mm/13-9TPI
7321-T15*	3.5-5mm/8-5TPI
7321-T16*	5.5-7mm/4.5-3.5TPI
7321-T1S*	6 pairs/set, including all above points

* It is necessary to use point sleeve (code **1526-T101**) for these points

Ball points (optional, supplied in pair)



Measuring range **
100-370mm/3.94-14.5"

** After installing points and point sleeve

Code	Ball dia. (D)
7391-T2*	SØ1.5mm
7391-T3*	SØ2.0mm
7391-T4*	SØ2.5mm
7391-T5*	SØ3.0mm
7391-T6*	SØ3.5mm
7391-T7*	SØ4.0mm
7391-T8*	SØ4.5mm
7391-T9*	SØ5.0mm
7391-T10*	SØ6.0mm

* It is necessary to use point sleeve (code **1526-T101**) for these points

DATA OUTPUT

VIDEO

LARGE RANGE DIGITAL EXTERNAL MEASURING GAUGES



2935-321


- Measure external dimensions
- Resolution: 0.001mm/0.00005"
- Accuracy: 5μm
- Repeatability: 1μm
- Movable point stroke: 5mm/0.2"
- Point height is adjustable, h=2-25mm
- CR2032 battery, automatic power off (time is adjustable)
- Data output


To be continued

Continued from previous page

Spherical/flat points (optional, supplied in pair)









Code	Measuring range	Material
2932-S103	30-320mm/1.2-12.6"	stainless steel

Point sleeve (optional, supplied in pair)






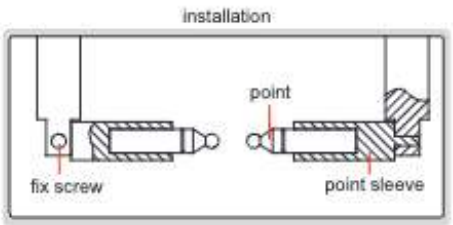

Code
1526-T101

5

Multifunctional points (optional, supplied in pair)

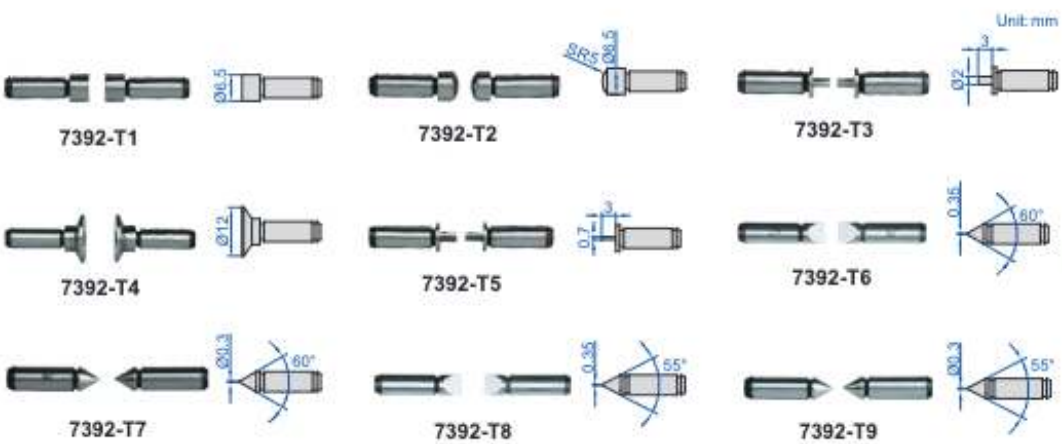

Measuring range**
0-300mm/0-11.8"

**After installing points and point sleeve


Code	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point

*It is necessary to use point sleeve (code **1526-T101**) for these points

Screw thread points (optional, supplied in pair)



7381-T16



Measuring range**
0-300mm/0-11.8"

**After installing points and point sleeve

External thread (60° thread angle)

Code	Pitch
7381-T11*	0.4-0.5mm/64-48TPI
7381-T12*	0.6-0.9mm/44-28TPI
7381-T13*	1-1.75mm/24-14TPI
7381-T14*	2-3mm/13-9TPI
7381-T15*	3.5-5mm/8-5TPI
7381-T16*	5.5-7mm/4.5-3.5TPI
7381-TS*	6 pairs/set, including all above points

*It is necessary to use point sleeve (code **1526-T101**) for these points

Ball points (optional, supplied in pair)



7391-T5



Measuring range**
0-300mm/0-11.8"

**After installing points and point sleeve

Code	Ball dia. (D)
7391-T2*	SØ1.5mm
7391-T3*	SØ2.0mm
7391-T4*	SØ2.5mm
7391-T5*	SØ3.0mm
7391-T6*	SØ3.5mm
7391-T7*	SØ4.0mm
7391-T8*	SØ4.5mm
7391-T9*	SØ5.0mm
7391-T10*	SØ6.0mm

*It is necessary to use point sleeve (code **1526-T101**) for these points