FLOOR SCALES

CAN BE CUSTOMIZED | DATA OUTPUT

VIDEO



8401-1T1212

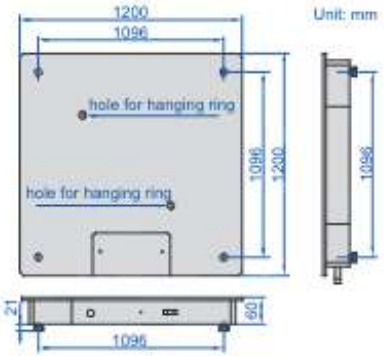

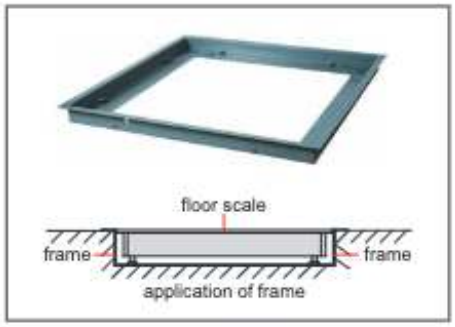

frame (**optional**)



ramp (**optional**)



stand (**optional**)



alarm light (**optional**)



printer (**optional**)

- LCD large screen display with automatic backlight
- Zero, overweight alarm, deduction, unit conversion, accumulating, animal scale, etc.
- Unit: kg, g, lb, oz
- OIML approved load cell

STANDARD DELIVERY

Main unit	1 pc
Indicator	1 pc
AC/DC adapter	1 pc
Stainless steel foot	4 pcs
Hanging ring	2 pcs

SPECIFICATION

Code	**8401-1T1212**	**8401-2T1212**	**8401-3T1212**
Maximum weighing	1t	2t	3t
Minimum weighing	10kg	20kg	20kg
Resolution (d)	0.5kg	1kg	1kg
Verification interval (e)	0.5kg	1kg	1kg
Accuracy (m is load)	m≤250kg: ±0.25kg; 250kg<m≤1000kg: ±0.5kg	m≤500kg: ±0.5kg; 500kg<m≤2000kg: ±1kg; m>2000kg: ±1.5kg	
Load cell	4 pcs 350Ω		
Operation temperature	-10~40°C		
Material	mild steel		
Dimension of platform	1200×1200mm		
Power supply	rechargeable lead acid battery (6V/4Ah)		
Output	RS232		
Weight	140kg		

OPTIONAL ACCESSORY

Ramp	**8401-1212-1**
Frame	**8401-1212-2**
Stand	**8401-STAND**
Printer	**8001-PRINTER**
Alarm light	**8001-ALARM**
Data output cable (keyboard format)	**7302-8001**
Wireless transmitter (receiver is needed)	**7315-8001**