Digital Caliper For Inside Grooves



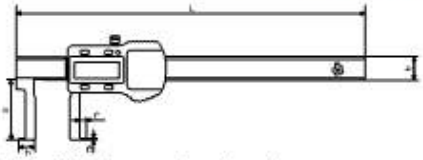

Description

- For inside groove measuring,Absolute system with 3V
- A green LED light turn on when the reading is within preset tolerance limits
- IP54 protection, water and dust resistant
- Scale with glass rail for precision sampling
- No moving speed limit,Stainless steel, hardened
- With ORIGIN, MODE, TOL and INC/POWER four buttons,Four way measurement
- Deliver in plastic box with inspection report
- Data output with mini USB interface

Overall Dimension(mm)

Range	L	a	b	c	e	h
20-150mm	235	36	10	4	1	16
25-200mm	287	46	12.5	5	1	16
30-300mm	390	56	15	5	1.5	16

Art No.	Range	Reading	Length Of Jaw	Accuracy Error	Barcode
2214-150	20-150mm	0.01mm/0.0005"	36mm	0.03mm	6971570718050
2214-200	25-200mm	0.01mm/0.0005"	46mm	0.03mm	6972727952969
2214-300	30-300mm	0.01mm/0.0005"	56mm	0.04mm	6972727952976

Digital Caliper For Outside Grooves



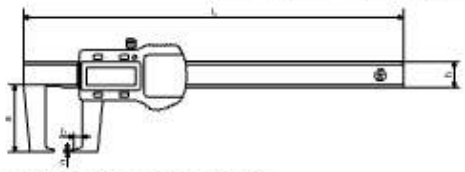

Description

- For outside groove measuring,Absolute system with 3V
- A green LED light turn on when the reading is within preset tolerance limits
- IP54 protection, water and dust resistant
- Scale with glass rail for precision sampling
- No moving speed limit,Stainless steel, hardened
- Four way measurement
- With ORIGIN,MODE,TOL and INC/POWERfour buttons
- Deliver in plastic box with inspection report
- Data output with mini USB interface

Overall Dimension(mm)

Range	L	a	b	c	h
0-150mm	250	40	5	1	16
0-200mm	300	50	7	1	16
0-300mm	405	60	8	1.5	16

Art No.	Range	Reading	Length Of Jaw	Accuracy Error	Barcode
2215-150	150mm/6"	0.01mm/0.0005"	40mm	0.03mm	6971570718029

Digital Tube Thickness Caliper



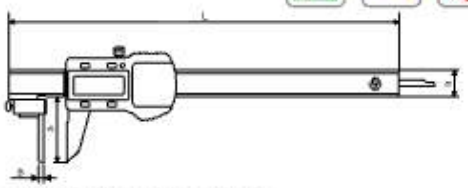

Description

- A green LED light turn on when the reading is within preset tolerance limits,Absolute system with 3V
- IP54 protection, water and dust resistant
- Scale with glass rail for precision sampling
- No moving speed limit,Stainless steel, hardened
- Designed for measuring the wall thickness of tube
- With ORIGIN,MODE,TOL and INC/POWER four buttons
- Deliver in plastic box with inspection report
- Big LCD display, Data output with mini USB interface

Overall Dimension(mm)

Range	L	a	b	h
0-150mm	250	46	4	16
0-200mm	300	50	4	16
0-300mm	400	66	4	16

Art.No.	Range	Reading	Barcode
2216-150	0-150mm/0-6"	0.01mm/0.0005"	6971570718081