
Dial Test Indicators



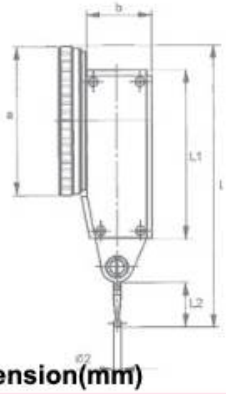

Description

- High performance of magnetic proof because of high quality brass main body
- Jeweled bearing for high sensitivity and long life
- Carbide contact point ø2mm for long life
- 230° big turning range of stylus
- Total 3 dovetails for fixing attachments
- Supply with accessories: clamping stems ø6mm and ø8mm
- Packed in card box,Deliver with certificate

Overall Dimension(mm)

Range	L	a	b	L1	L2
0-0.8mm	72.8	30	18.5	48	12.5
0-0.8mm	72.8	37.5	18.5	48	12.5
0-0.2mm	72.8	37.5	18.5	48	12
0-0.8mm	72.8	37.5	18.5	48	42.4

Art No.	Range	Reading	Dia Of Dial Ring	Length Of Stylus	Barcode
220-7046	0-0.8mm	0.01mm	30mm	16.5mm	6971570717046
220-7053	0-0.8mm	0.01mm	37.5mm	16.5mm	6971570717053
220-7060	0-0.2mm	0.002mm	37.5mm	16mm	6971570717060
4104-28	0-0.8mm	0.01mm	37.5mm	46.4mm	6972727951542

Diamagnetic Probe



- Resist magnetic
- Special stainless steel rod, ruby ball


Art.No.	Size	Thread	Used for..
WP-220-CK010	Ø 2x13.5 mm	M1.6	For dial test indicator 220-7046, 220-7053
WP-220-CK011	Ø 2x16.8 mm	M1.6	For dial test indicator 220-7060
WP-4104-05R-DM	Ø 2x27.4 mm	M1.6	For dial test indicator 4104-28
WP-4104-07R-DM	Ø 2x46.4 mm	M1.6	For dial test indicator 4104-28

Large Range Dial Test Indicator

Description

- High performance of magnetic proof because of high quality brass main body
- Jeweled bearing for high sensitivity and long life
- With 2mm carbide contact point
- With 2 dovetails and 4mm fixing rod
- Deliver with certificate
- Packed in plastic box





Art.No.	Range	Reading	Dia of dial ring	Barcode
4113-016	0-1.6 mm	0.01 mm	37.5 mm	6976367673154