

Light Digital Depth Gauge

Description

- Made in and originated from Germany
- LCD display
- Made of light metal,anodized surface
- With 3 interchangeable bridges
- Ball tip,With stop screws,1.5V battery(LR44)
- Delivered with a manual,Plastic box
- Delivered with an inspection report
- ON/OFF,Reset,mm/inch

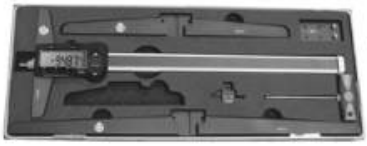



Art.No.	Range	Scale	Indication error	Bridge	Barcode
2113-300	0-300 mm	0.01 mm	0.04 mm	150/300/450 mm	6974804572763
2113-500	0-500 mm	0.01 mm	0.05 mm	150/300/450 mm	6974804572770
2113-800	0-800 mm	0.01 mm	0.06 mm	150/300/450 mm	6974804572787

Light Digital Depth Gauge

Description


- Made in and originated from Germany
- Made of light metal,anodized surface
- With extended bridge and base
- Disk contact tip,With stop screws
- LCD display,1.5V battery(LR44)
- Delivered with a manual,Plastic box
- Delivered with an inspection report
- ON/OFF,Reset,mm/inch



Art.No	Range	Scale	Indication error	Bridge/extended base	Barcode
2113-100D	0-100 mm	0.01 mm	0.03 mm	150/350 mm	6974804572794
2113-200D	0-200 mm	0.01 mm	0.03 mm	150/350 mm	6974804572800
2113-300D	0-300 mm	0.01 mm	0.04 mm	150/350 mm	6974804572817
2113-500D	0-500 mm	0.01 mm	0.05 mm	150/350 mm	6974804572824
2113-800D	0-800 mm	0.01 mm	0.06 mm	150/350 mm	6974804572831
2113-950D	0-950 mm	0.01 mm	0.06 mm	150/350 mm	6974804572848

Digital Depth Gauge



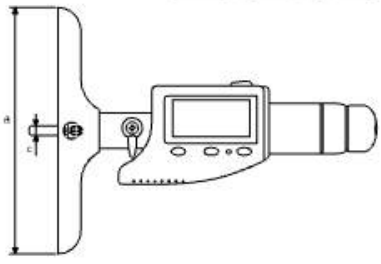

Description

- A green LED light turn on when thereading is within preset tolerance limits
- IP54 protection, water and dust resistant
- Inserts simply exchangeable
- With ratchet friction thimble
- With functions of mm/inch, zero setting at any position, power on/off and Tolerance setting
- Data output with mini USB interface
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report

Overall Dimension(mm)

Range	a	c
0-150mm/102mm	102	4.5

Art No.	Range	Reading	Accuracy error	Barcode
217-6254	0-150mm/0-6"	0.001mm/0.00005"	0.003mm	6971570716254