
Digital Outside Micrometers IP54



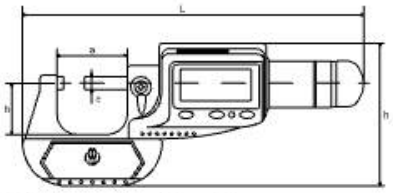

Description

- Accuracy according to DIN863
- IP54 protection, water and dust resistant
- Painted framed, with ratchet friction thimble
- Carbide measuring face
- With functions of mm/inch, zero setting at any position, power on/off
- From size 25-50mm including setting gauge
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report


Overall Dimension(mm)

Range	L	a	b	c	h
0-25mm	156	32	25	6.5	63
25-50mm	185	57	31	6.5	80
50-75mm	212	82	44	6.5	95
75-100mm	240	107	56	6.5	113
100-125mm	269	132	68	6.5	128
125-150mm	296	157	81	6.5	146

Art No.	Range	Reading	Accuracy Error	Barcode
217-5806	0-25mm/0-1"	0.001mm/0.00005"	0.003mm	6971570715806
217-5813	25-50mm/1-2"	0.001mm/0.00005"	0.003mm	6971570715813
217-5820	50-75mm/2-3"	0.001mm/0.00005"	0.004mm	6971570715820
217-5837	75-100mm/3-4"	0.001mm/0.00005"	0.004mm	6971570715837
217-5844	100-125mm/4-5"	0.001mm/0.00005"	0.005mm	6971570715844
217-5851	125-150mm/5-6"	0.001mm/0.00005"	0.005mm	6971570715851

Digital Outside Micrometers IP54



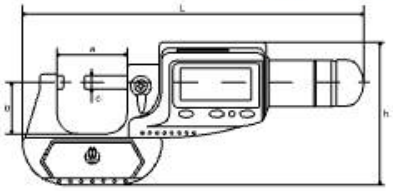

Description

- Accuracy according to DIN863
- A green LED light turn on when the reading is within preset tolerance limits
- IP54 protection, water and dust resistant
- Painted framed, with ratchet friction thimble
- Carbide measuring face
- With functions of mm/inch, zero setting at any position, power on/off and Tolerance setting
- From size 25-50mm including setting gauge
- Data output with mini USB interface
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report

Overall Dimension(mm)

Range	L	a	b	c	h
0-25mm	156	32	25	6.5	63
25-50mm	185	57	31	6.5	80
50-75mm	212	82	44	6.5	95
75-100mm	240	107	56	6.5	113
100-125mm	269	132	68	6.5	128
125-150mm	296	157	81	6.5	146

Art No.	Range	Reading	Accuracy error	Barcode
217-5868	0-25mm/0-1"	0.001mm/0.00005"	0.003mm	6971570715868
217-5875	25-50mm/1-2"	0.001mm/0.00005"	0.003mm	6971570715875
217-5882	50-75mm/2-3"	0.001mm/0.00005"	0.004mm	6971570715882
217-5899	75-100mm/3-4"	0.001mm/0.00005"	0.004mm	6971570715899
217-5905	100-125mm/4-5"	0.001mm/0.00005"	0.005mm	6971570715905
217-5912	125-150mm/5-6"	0.001mm/0.00005"	0.005mm	6971570715912