# Digital Caliper




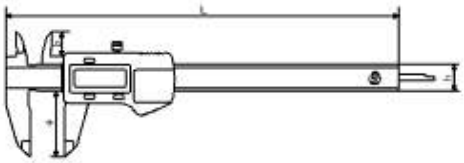

## Description

- Top quality.
- Accuracy according to DIN862
- Stainless steel, hardened,Four way measurement
- With mm/inch, ON/OFF and ZERO 3 buttons
- Deliver in plastic box with 3V CR2032 battery and inspection report

## Overall Dimension(mm)

| Range | L | a | b | h |
|---|---|---|---|---|
| 0-150mm | 236 | 40 | 16.5 | 16 |
| 0-200mm | 286 | 50 | 19.5 | 16 |
| 0-300mm | 400 | 60 | 21.5 | 16 |

| Art.No. | Range | Reading | Accuracy error | Barcode | |
|---|---|---|---|---|---|
| 210-8814 | 150mm/6" | 0.01mm/0.0005" | 0.03mm | 6971570718814 | |
| 210-8821 | 200mm/8" | 0.01mm/0.0005" | 0.03mm | 6971570718821 | |
| 210-8838 | 300mm/12" | 0.01mm/0.0005" | 0.03mm | 6971570718838 | |
| 210-9064 | 150mm/6" | 0.01mm/0.0005" | 0.03mm | 6971570719064 | with removeable thumbroll |
| 210-9071 | 200mm/8" | 0.01mm/0.0005" | 0.03mm | 6971570719071 | with removeable thumbroll |
| 210-9088 | 300mm/12" | 0.01mm/0.0005" | 0.03mm | 6971570719088 | with removeable thumbroll |

# Digital Caliper With Carbide Measuring Face



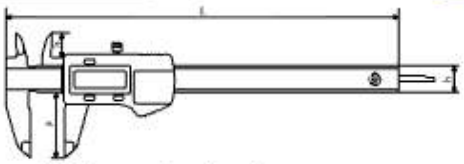

## Description

- Accuracy according to DIN862
- Carbide measuring face,Made of stainless steel
- With mm/inch, ON/OFF, ZERO buttons
- Deliver in plastic box with 3V CR2032 battery and inspection report

## Overall Dimension(mm)

| Range | L | a | b | h |
|---|---|---|---|---|
| 0-150mm | 236 | 40 | 16.5 | 16 |
| 0-200mm | 286 | 50 | 19.5 | 16 |
| 0-300mm | 400 | 60 | 21.5 | 16 |

| Art.No. | Range | Reading | Accuracy Error | Barcode |
|---|---|---|---|---|
| 2232-150 | 150mm/6" | 0.01mm/0.0005" | 0.03mm | 6972727952778 |
| 2232-200 | 200mm/8" | 0.01mm/0.0005" | 0.03mm | 6972727952785 |
| 2232-300 | 300mm/12" | 0.01mm/0.0005" | 0.03mm | 6972727952792 |

# ABS Digital Caliper



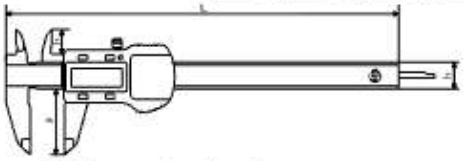

## Description

- Top quality.Accuracy according to DIN862
- A green LED light turn on when the reading is within preset tolerance limits
- Absolute system with 3V,No moving speed limit
- IP54 protection, water and dust resistant
- Scale with glass rail for precision sampling
- Stainless steel, hardened Four way measurement
- With ORIGIN, MODE, TOL and INC/POWER four buttons
- Deliver in plastic box with inspection report
- Data output with mini USB interface

## Overall Dimension(mm)

| Range | L | a | b | h |
|---|---|---|---|---|
| 0-150mm | 236 | 40 | 16.5 | 16 |
| 0-200mm | 286 | 50 | 19.5 | 16 |
| 0-300mm | 390 | 60 | 21.5 | 16 |

| Art.No. | Range | Reading | Accuracy Error | Barcode |
|---|---|---|---|---|
| 2203-150 | 150mm/6" | 0.01mm/0.0005" | 0.02mm | 6971570717848 |
| 2203-200 | 200mm/8" | 0.01mm/0.0005" | 0.03mm | 6971570717855 |
| 2203-300 | 300mm/12" | 0.01mm/0.0005" | 0.03mm | 6971570717862 |