
Digital Outside Micrometers IP65



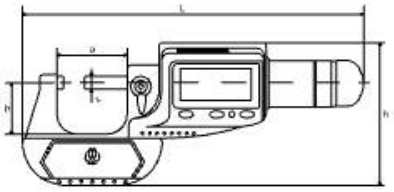

Description

- Accuracy according to DIN863
- Inductive measuring system
- IP65 protection, water and dust resistant
- Painted framed, with ratchet friction thimble
- Carbide measuring face
- With functions of mm/inch, zero setting at any position, power on/off and data hold
- From size 25-50mm including setting gauge
- Data output with mini USB interface
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report


Overall Dimension(mm)

Range	L	a	b	c	h
0-25mm	156	32	25	6.5	63
25-50mm	185	57	31	6.5	80
50-75mm	212	82	44	6.5	95
75-100mm	240	107	56	6.5	113
100-125mm	269	132	68	6.5	128
125-150mm	296	157	81	6.5	146

Art No.	Range	Reading	Accuracy Error	Barcode
217-5929	0-25mm/0-1"	0.001mm/0.00005"	0.003mm	6971570715929
217-5936	25-50mm/1-2"	0.001mm/0.00005"	0.003mm	6971570715936
217-5943	50-75mm/2-3"	0.001mm/0.00005"	0.004mm	6971570715943
217-5950	75-100mm/3-4"	0.001mm/0.00005"	0.004mm	6971570715950
217-5967	100-125mm/4-5"	0.001mm/0.00005"	0.005mm	6971570715967
217-5974	125-150mm/5-6"	0.001mm/0.00005"	0.005mm	6971570715974

Digital Outside Micrometers IP65



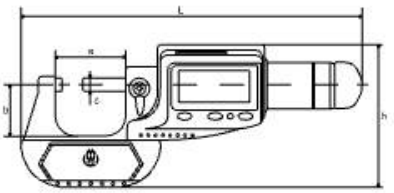

Description

- Accuracy according to DIN863.
- A green LED light turn on when the reading is within preset tolerance limits
- Inductive measuring system
- IP65 protection, water and dust resistant
- Painted framed, with ratchet friction thimble
- Carbide measuring face
- With functions of mm/inch, zero setting at any position, power on/off and Tolerance setting
- From size 25-50mm including setting gauge
- Data output with mini USB interface
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report

Overall Dimension(mm)

Range	L	a	b	c	h
0-25mm	156	32	25	6.5	63
25-50mm	185	57	31	6.5	80
50-75mm	212	82	44	6.5	95
75-100mm	240	107	56	6.5	113
100-125mm	269	132	68	6.5	128
125-150mm	296	157	81	6.5	146

Art No.	Range	Reading	Accuracy Error	Barcode
217-5981	0-25mm/0-1"	0.001mm/0.00005"	0.003mm	6971570715981
217-5998	25-50mm/1-2"	0.001mm/0.00005"	0.003mm	6971570715998
217-6001	50-75mm/2-3"	0.001mm/0.00005"	0.004mm	6971570716001
217-6018	75-100mm/3-4"	0.001mm/0.00005"	0.004mm	6971570716018
217-6025	100-125mm/4-5"	0.001mm/0.00005"	0.005mm	6971570716025
217-6032	125-150mm/5-6"	0.001mm/0.00005"	0.005mm	6971570716032