
Dial Caliper



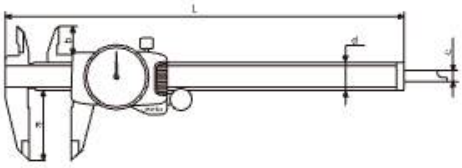

Description

- Made of stainless, hardened
- Metal housing
- High quality movement of dial
- With shock-proof function
- With fine adjustment wheel
- Flat depth rod, With locking screw
- Deliver with inspection report, Packed in plastic box


Overall Dimension(mm)

Range	L	a	b	c	d
0-150mm	235	40	15.5	6.5	16
0-200mm	286	50	19.5	6.5	16
0-300mm	410	64	22	7.45	20

Art.No.	Range	Reading	Range Per Revolution	Accuracy Error	Standard	Barcode	Remark
2305-150	0-150 mm	0.02 mm	2 mm	0.02 mm	DIN 862	6974804572947	
2305-200	0-200 mm	0.02 mm	2 mm	0.03 mm	DIN 862	6974804572954	
2305-300	0-300 mm	0.02 mm	2 mm	0.03 mm	DIN 862	6974804572961	
2305-1501	0-150 mm	0.01 mm	100 mm	0.06 mm	DIN 862	6976367674182	New
2305-2001	0-200 mm	0.01 mm	100 mm	0.06 mm	DIN 862	6976367674199	New
2305-3001	0-300 mm	0.01 mm	150 mm	0.06 mm	DIN 862	6976367674205	New




Brand new metal housing. Built-in double shock-proof mechanism.Ergonomically optimized fine-tuning thumbwheel set.

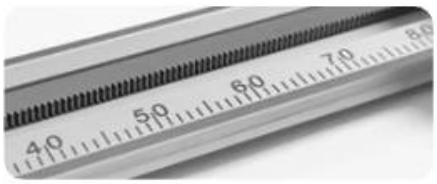

more endurable high-precision gear rack. chromed surface with clearer, more legible laser printing.

Ip67 Water-Proof Digital Caliper With Color Screen



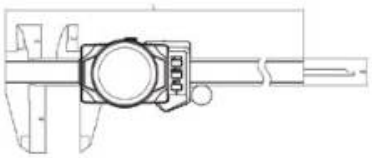

Description

- Full color LCD, New design
- Analog electronic pointer and analog digital display simultaneously
- Built-in rechargeable lithium battery, magnetic suction charging port
- With six kinds of resolution
- Backlight display with three kinds of brightness
- Metal housing, with thumbroll
- Made of stainless steel
- IP67 Protection, water and dust resistant
- Accuracy according to DIN862
- Measuring faces hardened
- DATA, MENU, STE/0
- Delivered with an inspection report
- Prime plastic box
- Built-in bluetooth type is optional

Overall dimension(mm)

Range	A	B	C	L
0-100 mm	40	20	15.5	185
0-150 mm	40	20	15.5	235
0-200 mm	50	24	19.5	287
0-300 mm	60	26	21.5	390

Analog electronic pointer display:



Analog digital display:



Art.No.	Range	Reading	Indication Error	Standard	Barcode	
2262-150	0-150 mm	0.01mm	0.02mm	DIN 862	6976367672577	
2262-200	0-200 mm	0.01mm	0.03mm	DIN 862	6976367672584	
2262-300	0-300 mm	0.01mm	0.03mm	DIN 862	6976367672591	
2262-150W	0-150 mm	0.01mm	0.02mm	DIN 862	6976367672904	Build-in bluetooth
2262-200W	0-200 mm	0.01mm	0.03mm	DIN 862	6976367672911	Build-in bluetooth
2262-300W	0-300 mm	0.01mm	0.03mm	DIN 862	6976367672928	Build-in bluetooth