
Digital Indicator For Bore Gauge



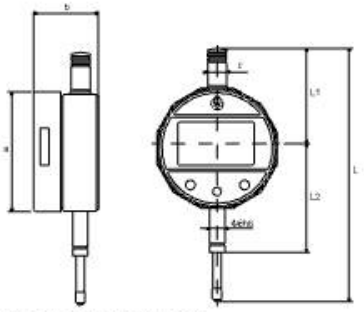

Description

- Designed specially for bore gauges, With analog pointer
- Scale with glass rail for precision sampling
- Min data searched and stored
- Buttons:START, ABS, ZERO/ON, CAL, M
- With USB data output, Flat back
- Packed in plastic box with 3V CR2032 battery
- Deliver with certificate


Overall Dimension(mm)

Range	L	a	b	L1	L2
0-12.7mm	125	57.4	32.4	47.7	51.5
0-12.7mm	125	57.4	32.4	47.7	51.5

Art No.	Range	Reading	Barcode
221-9217	0-12.7mm	0.002mm	6971570719217
221-9224	0-12.7mm	0.001mm	6971570719224

Digital Indicator



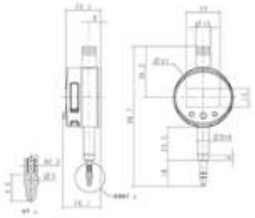

Description

- Pocket design, suitable for use in space limited environments
- Glass capacitive grid sensor system
- ABS absolute/relative measurement function
- mm/inch convertion
- With automatic power off
- With standard data interface
- 3V battery
- Delivery with inspection report
- Packed in plastic box

Art.No.	Range	Reading	Indication Error	Standard	Barcode
4212-05	0-5 mm	0.01mm	0.02mm	Enterprise	6976367672607
4212-05M	0-5 mm	0.001mm	0.004mm	Enterprise	6974804579762