Digital Indicator

Description

- A green LED light turn on when the reading is within preset tolerance limits
- Absolute system with 3V battery
- Scale with glass rail for precision sampling
- Stem ø8mm h6
- Display rotatable 0-330° for easy reading at different position
- With buttons:in/mm,+/-(For measuring direction) ZERO/ABS,PRESET,ORIGIN,TOL and power
- Data output with mini USB interface
- With flat back and one lug back as accessory
- Packed in plastic box, Deliver with certificate




Art No.	Range	Reading	Accuracy Error	Barcode
221-8128	0-12.7mm/0-0.5"	0.01mm/0.0005"	0.01mm	6971570718128

Digital Indicator

Description

- A green LED light turn on when the reading is within preset tolerance limits
- Absolute system with 3V battery
- Scale with glass rail for precision sampling
- Stem ø8mm h6
- Display rotatable 0-330° for easy reading at different position
- With buttons:in/mm,+/-(For measuring direction) ZERO/ABS,PRESET,ORIGIN,TOL and power
- Data output with mini USB interface
- With flat back and one lug back as accessory
- Packed in plastic box, Deliver with certificate

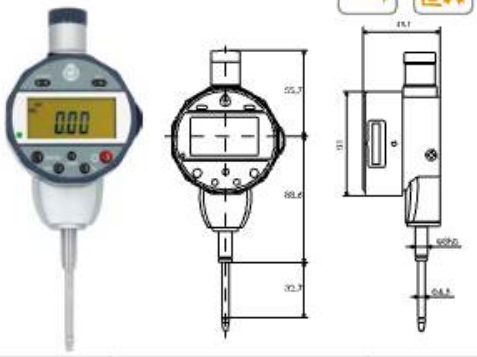


Art No.	Range	Reading	Accuracy Error	Barcode
221-8135	0-25mm/0-1"	0.01mm/0.0005"	0.01mm	6971570718135

Digital Indicator

Description

- A green LED light turn on when the reading is within preset tolerance limits
- Absolute system with 3V battery
- Scale with glass rail for precision sampling
- Stem ø8mm h6
- Display rotatable 0-330° for easy reading at different position
- With buttons:in/mm,+/-(For measuring direction) ZERO/ABS,PRESET,ORIGIN,TOL and power
- Data output with mini USB interface
- With flat back and one lug back as accessory
- Packed in plastic box, Deliver with certificate

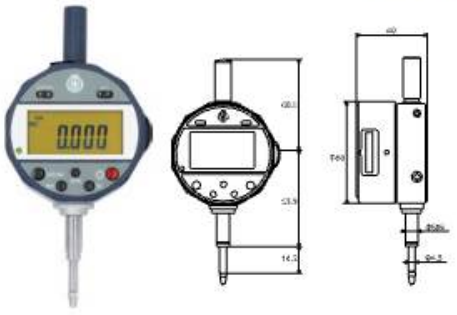

Art No.	Range	Reading	Accuracy Error	Barcode
221-8142	0-12.7mm/0-0.5"	0.001mm/0.00005"	0.004mm	6971570718142