
Outside Micrometers



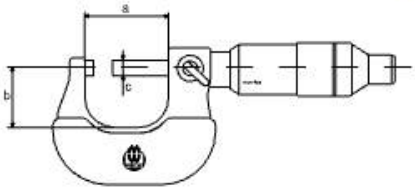

Description

- 0.001mm/0.0001" reading, parallax-free by enlarged thimble
- With ratchet friction thimble
- Carbide measuring face,With adjusting key
- Frame painted, scale chrome finished
- From size 25-50mm including setting gauge
- Deliver in cardbox with inspection certificate


Overall Dimension(mm)

Range	a	b	c
0-25mm/0-1"	32	24	6.5
25-50mm/1-2"	57	32	6.5
50-75mm/2-3"	82	45	6.5
75-100mm/3-4"	107	57	6.5

Art No.	Range	Reading	Accuracy Error	Barcode
217-5646	0-25mm	0.001mm	0.004mm	6971570715646
217-5653	25-50mm	0.001mm	0.004mm	6971570715653
217-5660	50-75mm	0.001mm	0.005mm	6971570715660
217-5677	75-100mm	0.001mm	0.005mm	6971570715677
217-5684	0-1"	0.0001" inch	0.00015" inch	6971570715684
217-5691	1-2"	0.0001" inch	0.00015" inch	6971570715691
217-5707	2-3"	0.0001" inch	0.00020" inch	6971570715707
217-5714	3-4"	0.0001" inch	0.00020" inch	6971570715714

Micrometer With Interchangeable Anvils



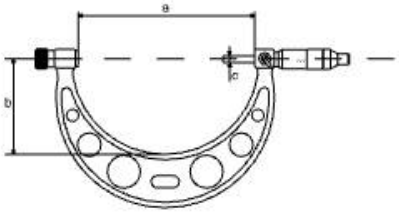

Descrption and Function

- Painted framed, with ratchet friction thimble and thimble chrome finished
- With exchangeble anvils, With carbide measuring faces
- Spindle φ8.0mm, With setting gauges
- Accuracy manufacturer standard
- Deliver in wooden box with inspection report

Overall Dimension(mm)

Range	a	b	c
0-150mm/0-6"	158	82	6.5
150-300mm/6-12"	308	165	6.5

Art No.	Range	Reading	Anvils	Setting gauge	Barcode
217-5721	0-150mm	0.01mm	6	5	6971570715721
217-5738	150-300mm	0.01mm	6	5	6971570715738
217-5745	0-6"	0.0001"	6	5	6971570715745
217-5752	6-12"	0.0001"	6	5	6971570715752