
High Precision Digital Comparator





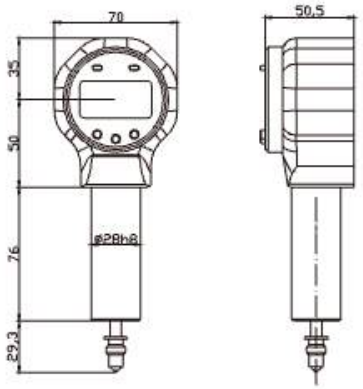

Description

- GB/T18761 According to GB/T18761
- Large display,clear reading
- ABD encoding grating measuring sytem, up to micrometer
- (4107-051、4107-052) W/O Bluetooth module; cable connection to transmit data
- (4107-051W、4107-052W) Built-in bluetooth module to make wireless data transmission available
- Built-in rechargeable battery
- With flat cover, stem ¢ 28h8
- Adapter
- Delivered with a manual
- Delivered with an inspection report
- Fancy plastic box
- ON/FF,Reset
- Data transmission,Data locking,Menu modes

Smart software and mobile phone APP

- Easy to install
- A couple of indicators can work at the same time
- To control and operate it via APP
- To collect and analyze data via PC software
- Suitable for more application scenarios

Bluetooth

- Bluetooth 5.0
- Lower power consumption, compatible with old versions
- Wider coverage
- Transmission speed 2-4 times faster
- Accurate positioning

Menus conversion

- F0=Normal measuring mode
- F1=Relative/Absolute measuring mode
- F2=mm/inch
- F3=Preset
- F4= Extreme value measuring mode
- F5=Tolerance setting - base value
- F6=Tolerence setting - lower limit
- F7=Tolerance setting - upper limit
- F8=Counting direction setting
- F9=Auto POWER OFF setting

Art.No.	Range	Resolution	Accuracy	Hysteresis error	Barcode	
4107-051	0-5 mm	0.0001 mm	0.0005 mm	0.0002 mm	6974804573449	
4107-051W	0-5 mm	0.0001 mm	0.0005 mm	0.0002 mm	6974804573456	with bluetooth
4107-052	0-5 mm	0.0002 mm	0.0014 mm	0.0006 mm	6974804573425	
4107-052W	0-5 mm	0.0002 mm	0.0014 mm	0.0006 mm	6974804573432	with bluetooth