


**BT KAMALI MORS ADAPTÖRÜ**

**MAS 403- BT/JIS B 6339**

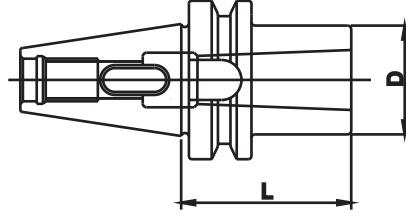


**DIN 6383**

- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3  
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	D (mm)	L (mm)	FİYAT KODU
BT40.K.MK1	BT40	MK1	25	50	00543
BT40.K.MK2	BT40	MK2	32	50	00544
BT40.K.MK3	BT40	MK3	40	70	00545
BT40.K.MK4	BT40	MK4	48	95	00546
BT50.K.MK3	BT50	MK3	40	65	00547
BT50.K.MK4	BT50	MK4	48	95	00548
BT50.K.MK5	BT50	MK5	63	105	00549

**BT ÇEKTİRME CİVATALI MORS ADAPTÖRÜ**

**MAS 403-BT/JIS B 6339**

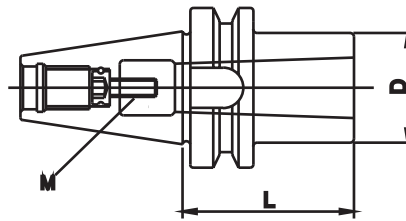

**DIN 6364**

- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3  
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	D (mm)	L (mm)	M (mm)	FİYAT KODU
BT40.C.MK1	BT40	MK1	25	50	M6	00550
BT40.C.MK2	BT40	MK2	32	50	M10	00551
BT40.C.MK3	BT40	MK3	40	70	M12	00552
BT40.C.MK4	BT40	MK4	63	95	M16	00553