PRECISION DIAL INDICATORS

JEWELED BEARING

INSPECTION CERTIFICATE

- Graduation: 0.001mm
- Jeweled bearing
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs (page 315~316), contact points (page 310~314)



2313-1A

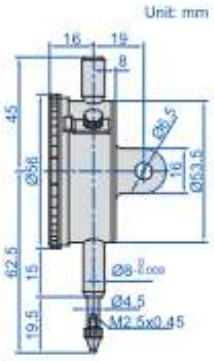

Code	Range	Accuracy	Hysteresis	Range/rev	Dial reading	Maximum measuring force	Cap	Remark
2313-1FA*	1mm	5μm	2μm	0.2mm	0-100-0	2N	cannot lift	flat back
2313-2FA*	2mm	6μm	2.5μm	0.2mm	0-100-0	2N	cannot lift	flat back
2313-1A*	1mm	5μm	2μm	0.2mm	0-100-0	2N	cannot lift	lug back
2313-2A*	2mm	6μm	2.5μm	0.2mm	0-100-0	2N	cannot lift	lug back

*Supplied with manufacturer inspection certificate

COMPACT DIAL INDICATOR

INSPECTION CERTIFICATE

INSIZE PLUS

- Meet DIN878
- With limit pointers
- Optional accessory: backs (page 315~316), contact points (page 310~314)



2886-3F



Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Maximum measuring force	Cap	Remark
2886-3F*	3mm	0.01mm	12μm	3μm	0.5mm	0-50	1.5N	can lift	flat back

*Supplied with manufacturer inspection certificate

10

COMPACT DIAL INDICATORS

INSPECTION CERTIFICATE

INSIZE PLUS

- Meet DIN878
- With limit pointers
- Optional accessory: backs (page 315~316), contact points (page 310~314)



2887-5



Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Maximum measuring force	Cap	Remark
2887-5*	5mm	0.01mm	14μm	3μm	0.5mm	0-50	1.5N	can lift	lug back
2887-5F*	5mm	0.01mm	14μm	3μm	0.5mm	0-50	1.5N	can lift	flat back

*Supplied with manufacturer inspection certificate