Digital Outside Micrometers IP65



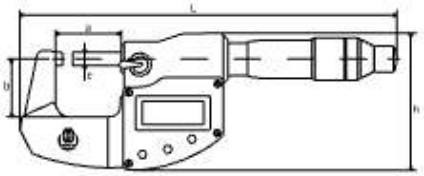

Description

- Accuracy according to DIN863
- IP65 protection, water and dust resistant
- Painted framed, with ratchet friction thimble and thimble chrome finished
- Carbide measuring face
- With ON/OFF, in/mm and ZERO three buttons
- From size 25-50mm including setting gauge
- Data output with mini USB interface
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report

Overall Dimension(mm)

Range	L	a	b	c	h
0-25mm	160	30	25	6.5	60
25-50mm	189	55	31	6.5	76
50-75mm	219	81	44	6.5	91
75-100mm	247	106	56	6.5	107
100-125mm	278	131	68	6.5	125
125-150mm	308	156	81	6.5	141

Art No.	Range	Reading	Accuracy Error	Barcode
217-6049	0-25mm/0-1"	0.001mm/0.00005"	0.003mm	6971570716049
217-6056	25-50mm/1-2"	0.001mm/0.00005"	0.003mm	6971570716056
217-6063	50-75mm/2-3"	0.001mm/0.00005"	0.004mm	6971570716063
217-6070	75-100mm/3-4"	0.001mm/0.00005"	0.004mm	6971570716070
217-6087	100-125mm/4-5"	0.001mm/0.00005"	0.005mm	6971570716087
217-6094	125-150mm/5-6"	0.001mm/0.00005"	0.005mm	6971570716094

Digital Tube Thickness Micrometers



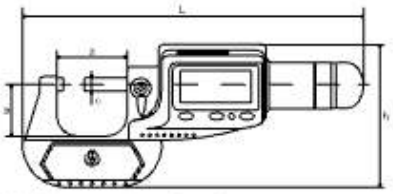

Description

- A green LED light turn on when the reading is within preset tolerance limits
- IP54 protection, water and dust resistant
- Painted framed, with ratchet friction thimble
- With Spherical faces of fixed anvil
- With functions of mm/inch, zero setting at any position, power on/off and Tolerance setting
- Data output with mini USB interface
- In plastic box, with 3V CR2032 battery
- Deliver with inspection report

Overall Dimension(mm)

Range	L	a	b	c	h
0-25mm	156	32	25	6.5	63
25-50mm	185	57	31	6.5	80
50-75mm	212	82	44	6.5	95
75-100mm	240	107	56	6.5	113

Art No.	Range	Reading	Accuracy Error	Barcode
217-6100	0-25mm/0-1"	0.001mm/0.00005"	0.003mm	6971570716100
217-6117	25-50mm/1-2"	0.001mm/0.00005"	0.003mm	6971570716117
217-6124	50-75mm/2-3"	0.001mm/0.00005"	0.004mm	6971570716124
217-6131	75-100mm/3-4"	0.001mm/0.00005"	0.004mm	6971570716131